

DECKBLATT ZUM ORIGINAL-DOKUMENT DES HERSTELLERS

DELTA | DATENBLATT OPTIONEN

HERSTELLER

Delta Elektronika BV

PRODUKTSERIE

Ethernet-Schnittstelle PSC-ETH-2 für ES-, SM800-, SM1500-, SM6000-Serie

Ihr direkter Ansprechpartner für Delta-Produkte!

Die Ing. Erhard Fischer GmbH ist Ihr zuverlässiger Partner für die Produkte von Delta Elektronika BV. Wir bieten Ihnen nicht nur hochwertigen technischen Support, sondern auch kompetente Beratung und maßgeschneiderte Lösungen für Ihre individuellen Anforderungen.

Ob Standardprodukt, kundenspezifische Geräte oder Schaltschrankbau. Wir freuen uns, Sie bei Ihrer Lösungsfindung mit eingehender Kundenberatung kompetent unterstützen zu können.

Kontaktieren Sie uns für technische Beratung oder ein individuelles Angebot!

Wir freuen uns auf das Gespräch mit Ihnen.



IHR ANSPRECHPARTNER

Martin Sochor



+43 2236 42694-40



powersupply@ing-fischer.at



Ing. Erhard Fischer GmbH



Weissenbach 101 | AT-2371 Hinterbrühl



www.ing-fischer.at



**Immer die passende Lösung für Industrie-
Stromversorgungen, Heizfolien & Messtechnik**

ING. ERHARD FISCHER GMBH



Card for inserting in power supply



External Module

PSC-ETH-2 - Ethernet Power Supply Controller


Interface between Ethernet IP Network and Power Supply

- IP-address configurable by user
- Build-in Card or External Module


Features

- Programming & Monitoring resolution 16 bit
- Web Interface
- Digital user in and outputs (isolated)
- Change power supply modes (Remote/Local etc.)
- Read-back of status signal
- Programming & Monitoring accuracy $\pm 0.1\%$
- DHCP Operation
- Integrated Sequencer
- Software Calibration
- SCPI commands

Integrated sequencer




Arbitrary Waveform generator or standalone automation. The sequencer is integrated in the Ethernet controller. User defined Waveforms can be stored in the sequencer.

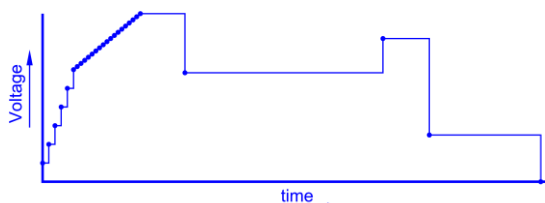

- Converts a power supply into an Arbitrary Waveform Generator
- Ideal for repetitive testing and automotive
- Can work like a PLC or stand-alone automation: steps interact with the actual in- and outputs
- Waveform generator independent of computer Stand-alone operating possible
- Battery voltage simulation, Surges, Function generator, etc.
- 25 free sequences having max. 2000 steps each
- Combination of fast and very slow sequences
- Steps from 1 ms till hours

Web Interface

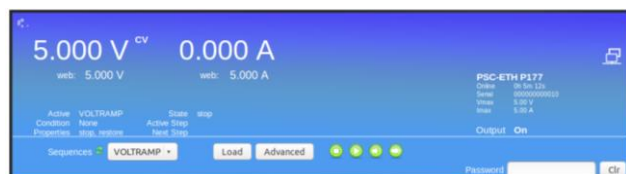

- Setting & Monitoring of voltage and current, actual and set values
- Setting & Monitoring Output On/Off
- Monitoring Status Icons: DC-fail, CC-mode, PSOL, Over Temp etc.
- Sequencer Uploading and Selecting
- Running, Pausing, Stopping and Triggering of Sequences
- Running in Single Step Mode

Sequencer

The PSC-ETH can control the power supply by a sequence without the need of an external computer.
The sequencer can even control the user outputs and read the user inputs.
A sequence is built from user programmable steps (or program lines).

A sequence step can do the following:

- Set the output Voltage and Current
- Jump to defined step number, unconditional or under condition of: Digital outputs or inputs, Variable, output voltage or current.
- Increment or Decrement output Voltage, Current or Variable
- Possibility to create loops, subroutines, ramps etc.
- Set a Digital output (8 available)
- Wait for trigger from Computer or Pause
- Set an internal Variable or internal Timer (resp. 8 or 2 available)

Sequences can be started / paused / stopped by: Commands via Ethernet (software) or by User Inputs (hardware) or Web.

Using digital user inputs for starting or stopping a sequence, makes it possible to choose the sequences by selecting the corresponding input, without being connected to a computer.

Analog inputs and outputs

The 2 analog in- and outputs have a 16 bits resolution. Offset and full scale can be software calibrated.
Input linearity error is +/- 1 LSB, output linearity error is +/- 2 LSB. TC typical is 10 ppm / °C.
Each analog in- and output can be set or read. Analog voltages are standardized on 0 - 5 VDC (with optional Power Sink $I_{mon} = -5 - 5$ VDC).
Analog in- and outputs have a common zero.

Status monitoring

The PSC provides logic status inputs to monitor the status signals of the power supply:
CC mode, current or voltage limit, DC fail, AC fail, Over Temperature, PSOL, etc.

Controls

Remote ShutDown: Enables / disables the output voltage of the power supply.
REMOTE: Switches from manual control to remote control (not on PSC-ETH-2 module).

Digital User Inputs and Outputs

The PSC-ETH-2 provides eight 60VDC opto-isolated logic inputs with common zero for custom use.
The input impedance is 1800 Ohm, Logic high = 2.5 - 30VDC, Logic low = 0V.
The PSC-ETH-2 provides also eight 60VDC opto-isolated, logic, open drain outputs with common zero for custom use.
The output impedance is 70Ohm, maximum rating is 30VDC / 200mA.

Software & Accessories

Example software and manual in PDF format can be downloaded from the website via [link](#).
The PSC-ETH-2 module is supplied with a Analog Programming Cable and a Line Cord.

General

Temperature: Operating temperature -20 - 50 °C, Storage temperature -40 - +70 °C.
Humidity: Max. 95% RH, non condensing, up to 40 °C, max. 75% RH, non condensing, up to 50 °C.
Insulation: LAN & Logic I/O to Case 60 VDC (functional insulation).
LAN & Logic I/O to 'minus' DC power terminal 60 VDC (functional insulation).

Warning! LAN & Logic I/O connectors are at safety level of the 'minus' DC power terminal of the power supply they are build in.
For Reinforced Insulation between LAN & Logic I/O and DC power terminals, build in an ISO-AMP and use external Module PSC-ETH-2 EXT.

External Module PSC-ETH-2 EXT

Enclosure

Dimensions (h x w x d): 89 x 85.5 x 118.5 mm
Weight: 0.7 kg
Degree of protection: IP20

Input Power

Rated voltage: 230VAC, wide range 98 - 264 VAC, 48 - 62 Hz
Power consumption: 10 W
Hold-up time @ 110 VAC : 80 ms, @ 230 VAC : 300 ms

Insulation

LAN & Analog & Logic I/O to case: 60 VDC
Mains input to case: 2500 VAC

EMC

Emission : EN 61326-1, class B equipment (for use in domestic establishments)
Immunity : EN 61326-1, equipment for use in industrial and domestic establishments

Ordering Information

Models	Order Code	Description	Digital User I/O	Comments
ES150	Option P150	ES150 Series with Build-in Card	Not available	Analog programming connector removed
ES300	Option P179	ES300 Series with Build-in Card	Not available	Analog programming connector removed
SM800	Option P256	SM800 Series with Build-in Card	Available	Analog programming connector still available
SM1500	Option P177	SM1500 Series with Build-in Card	Available	Analog programming connector still available
SM6000	Option P157	SM6000 Series with Build-in Card	Available	Analog programming connector still available, except on models SM300-20 & SM600-10.