




OSW00901

90W DC Power Supply

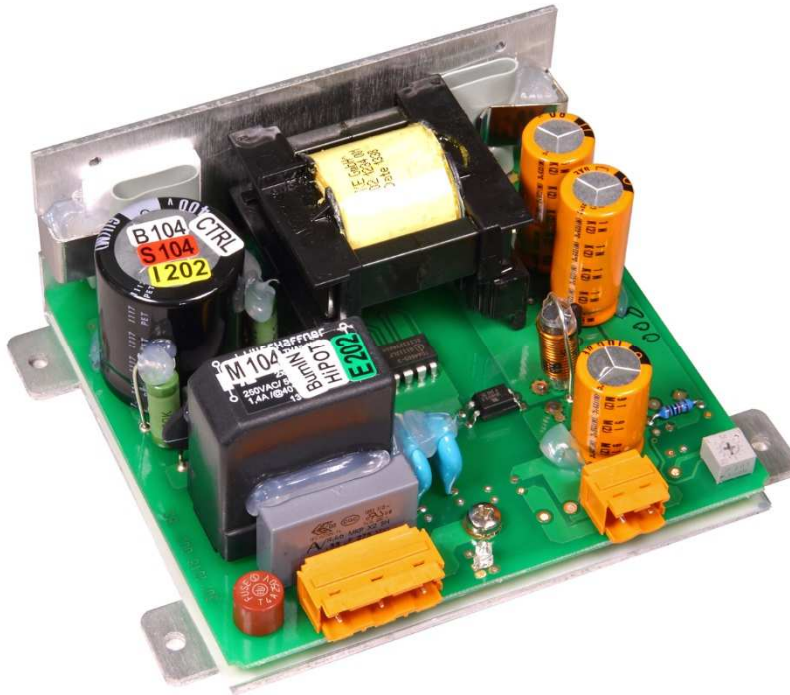

Specification:

- Up to 90% efficiency
- Natural convection
- Hold-up time >60ms
- N+1 parallel operation
- Metal housing
- Open Circuit Proof
- Designed for long life under full stress.
- Strong input filters
- High reliability, shock & vibration proof
- Over Voltage and continuous short circuit protection
- EMI/EMS EN61000-6-2,3, EN55032 class B
- EN61010-1, EN61010-2-201, EN62368-1

Models	Voltage	Current
OSW00901.024	24Vdc	3.8A
OSW00901.036	36Vdc	2.5A
OSW00901.048	48Vdc	1.9A
OSW00901.060	60Vdc	1.5A
OSW00901.072	72Vdc	1.3A
OSW00901.140	140Vdc	0.65A





Technical Concept

The Camtec OSW models are industrial power supplies „Made in Germany“. These power supplies are designed as a working horse for applications where a long lifetime is in the focus.

For more than 25 years the Camtec Power Supplies manufactures high-end switch mode power supplies in Germany. A field breakdown of below 0,004% over a 10-year period under review approves our ambitious quality concept. Each manufactured Camtec product passes 100% tests for each detailed function and a full-load Burn-In test.

Although it is not required from the safety norms our production applies a routine safety test to each manufactured device, even if it is an extra low-voltage model. The components in the assembled device pass stress aging to achieve an even level and to prevent from delayed failures. Our internal product engineering guidelines provide a clear target: Camtec product reputation must say „mount and forget“. Quality is never a mere promise for our team.

The OSW power supplies provide low noise and ripple, and a precise setting at high load changes. With an efficiency up to 90% the devices are highly energy efficient.

Equipped with high-end capacitors of outstanding lifetime our power supplies guarantee a very long and reliable operation time. The circuit design of the OSW series allows cope playing with complex loads. The internal protection circuits protect the power supply and the connected system, even in exceptional situations. The OSW series is protected from high transients by strong filters with high energy efficiency. All inputs and outputs are electrically isolated. The design specifications call for the highest standards of safety and interference suppression.

Design Conception

The OSW power supply series realizes high power in a space-saving housing. Latest generation electrical devices relate to the high reliability of all CAMTEC products. The CAMTEC philosophy is, to employ 125°C low ESR ultra long-life capacitors where expedient to achieve a superior lifetime of the product.

Galvanic Isolation

The power supply is galvanic isolated between the input and the output. All features are connected to the DC power outputs.

Over Voltage Protection

Ticker mode and auto recovery

Short Circuit Protection

A continuous short circuit does not cause damage to the power supply. The OSW units go into ticker operation. They recover automatically after the short circuit is released.

Open Circuit Protection

The OSW series is continuously open circuit protected. If a load is immediately connected to the device, the power supply stabilizes within 1ms. It does not overshoot the output voltage.

Power Up Ramp

The devices have a soft start ramp when powering up. The device does not either overshoot the voltage nor does the output flutter independent if a load is connected or not.





Technical Table

AC Input Range	90-264Vac			
AC Input Frequency	47-63Hz			
DC Input Range	110Vdc-375Vdc			
AC Input Rated	115Vac<1.8A 230Vac<1.1A			
DC Input Rated	110Vdc<1.0A 375Vdc<0.3A			
DC Voltage Rated	24Vdc	36Vdc	48Vdc	60Vdc
DC Voltage Setting Range	24,0 - 28,0V	34,2 - 39,6V	45,6 - 52,8V	57,0 - 66,0V
DC Current Rated +60°C	3.8A	2.5A	1.9A	1.5A
DC Current Rated +70°C	2.8A	1.9A	1.4A	1,1A
Power Boost 60s +60°C	4.2A	2.8A	2.1A	1.65A
Ripple Noise 230Vac 20MHz	50mVpp	60mVpp	60mVpp	100mVpp
Over Voltage Protection	35Vdc	52Vdc	70Vdc	87Vdc
Over Current Protection	4.6A	3.0A	2.3A	1.8A
Load Regulation 0-100%	< ±0.2%	< ±0.2%	< ±0.2%	< ±0.1%
DC Voltage Rated	72Vdc	140Vdc		
DC Voltage Setting Range	68,0 - 86,0V	133,0 - 155,0V		
DC Current Rated +60°C	1.3A	0.65A		
DC Current Rated +70°C	0.95A	0.48A		
Power Boost 60s +60°C	1.45A	0.72A		
Ripple Noise 230Vac 20MHz	120mVpp	120mVpp		
Over Voltage Protection	105Vdc	205Vdc		
Over Current Protection	1.6A	0.8A		
Load Regulation 0-100%	< ±0.1%	< ±0.1%		
Response Load Change	<1ms 10-100%, 100-10%			
Start-up Delay	Typ. 0.4s @ 230Vac, 1.0s @ 115Vac			
Softstart	Typ. 50ms			
Base Load	None			
Efficiency 230Vac	90% typical			
Short Circuit Protection	Continuous			
Idling-proof	Yes			
Hold Up Time	>60ms @ 230Vac			
Inrush Current	<32Apeak 230Vac cold start 25°C			
MCB (Circuit Breaker)	8A curve B			
Cooling	Natural convection			
Ambient Operating Temp.	- 25°C...+70°C, derating 2,5%/°C >60°C			
Ambient Storage Temp.	- 40°C...+85°C			
Environment	Humidity 95% non-condensing @ 25°C, climate class. 3k3, pollution degree 2			
ROHS	2011/65/EU, (EU)2015/863			
REACH	EG No. 1907/2006			
EMI	EN55032 class B, EN61000-6-3, EN61000-3-2 class A			
EMS	EN61000-6-2			
Safety	EN61010-1, EN61010-2-201, EN62368-1, EN60950-1, EN60204-1			
Protection Class I	PE connection required			
Creepage Distance	>8mm			
Input to Output Isolation	3000Vac			
Input to Case Isolation	2500Vac			
Output to Case Isolation	500Vdc, 2000Vdc for models with output voltage ≥ 48Vdc			
MTBF (IEC61709)	590000h (Meantime Between Failures: statistic time between failures after repairs)			
MTTF (IEC61709)	140056h (Meantime To Failure: statistic time to ever fails)			
Dimensions (HxWxD)	41x118x91mm			
Weight	0,3kg / 0,66lbs			
Input & Output Terminals	Spring-type terminal solid max. 0,25...2,5mm ² 24...14AWG according with IEC/EN60664-1, IEC/EN61984, Use copper conductors only. Wire stripping length 7mm. Tightening torque per terminal block is 0.4 - 0.5 Nm / 2.9 – 3.6 lbf-in			

Manual und Technical Details

Temperature Derating

The maximum ambient temperature during operation is + 70°C.

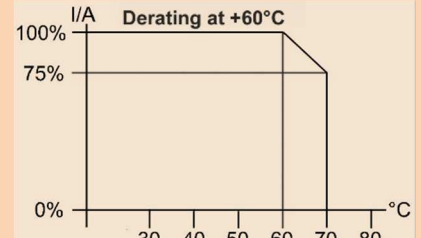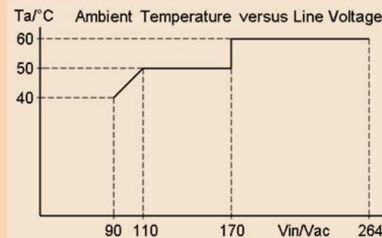


Baseplate Cooling & Temperature Management

The temperature management of the OSW series provides a direct dissipation of the main energy losses. The internal coolers of the output diodes and the power FETs connect to the back-plate cooler. It is possible to dissipate about 40 – 50% of the energy losses out of a system to a plane and heat conductive surface. For further information please consult our technical support.

Parallel Operation & N+1 Decoupling

To increase the overall power of the power supply, two or more devices of the same model with the same output voltage may be operated in parallel. We recommend using a busbar for the DC power connector. Make sure that the cable lengths and cable cross-sections of all power supplies to the busbar or to the star point are identical. Allow proper connection for low contact resistance.

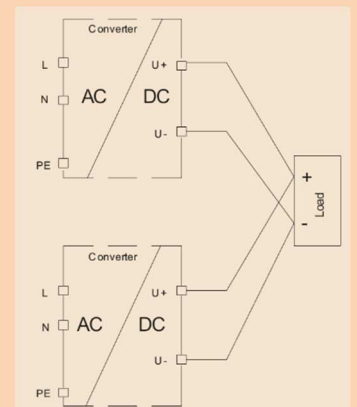

C/V Current Voltage Behaviour

When the OSW is overloaded it goes into the ticker mode. The unit automatically restarts when the load goes below the current limiting. Same happens with a short circuit at the output of the device.

Coating Option

We offer the OSW-series with optional coating. It is to be used in e.g., dusty, dirty, high humidity, or in awaiting quick temperature changes. Short circuit and corrosion at print board lines and at solder points can be prevented. The coat itself is a transparent acrylic resin. Peters SL 1306 N-FLZ (transparent) IEC60216-1 2001, IPC-CC-830B, UL listed as permanent coating File No.: E80315 , UL94V-0

DC Voltage setting range

Rated DC Voltage	24Vdc	36Vdc	48Vdc	60Vdc	72Vdc	140Vdc
Rated DC Current	3.8A	2.5A	1.9A	1.5A	1.3A	0.65A
DC Voltage Setting Range	24,0 - 28,0V	34,2 - 39,6V	45,6 - 52,8V	57,0 - 66,0V	68,0 - 86,0V	133,0 - 155,0V

The DC voltage can be adjusted with a precision 1 turn potentiometer with low temperature fading. The factory setting is to the rated voltage from the table above.


Electrical Safety (Factory-Test / Field-Test Owner)

	T	A	B	C ¹⁾
Type Test	60s	2500Vac	3000Vac	500Vdc
Factory Test	5s	2000Vac	1000Vac ²⁾	500Vdc
Field Test	2s	2000Vac	1000Vac ²⁾	500Vdc
Cut-off current setting	>10mA	>10mA	>1mA	


¹⁾ ≥48Vdc = 2000Vdc, ²⁾ ≥48Vdc = 2000Vac

Type and factory test are the manufacturer. While repeating damage can happen to the power supply unit. For the field test (owner) follow the below instruction:

- Use suitable test equipment, raising the voltage slowly.
- Short circuit L1 and N, and all the DC output terminals.
- Use only test voltages of 50/60Hz. The outputs are unearthed and therefore they have no resistance to GND/PE.
- If the residual voltage is ≥60Vdc, observe the safety standards. Use only specially insulated screwdriver to trim the Ua/Ia.

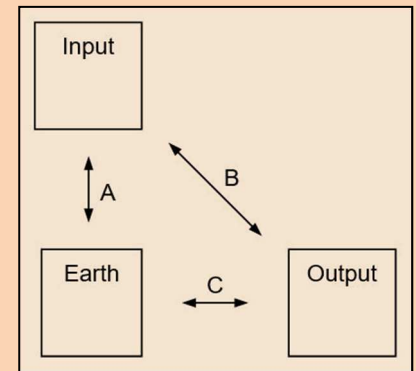

Mechanics

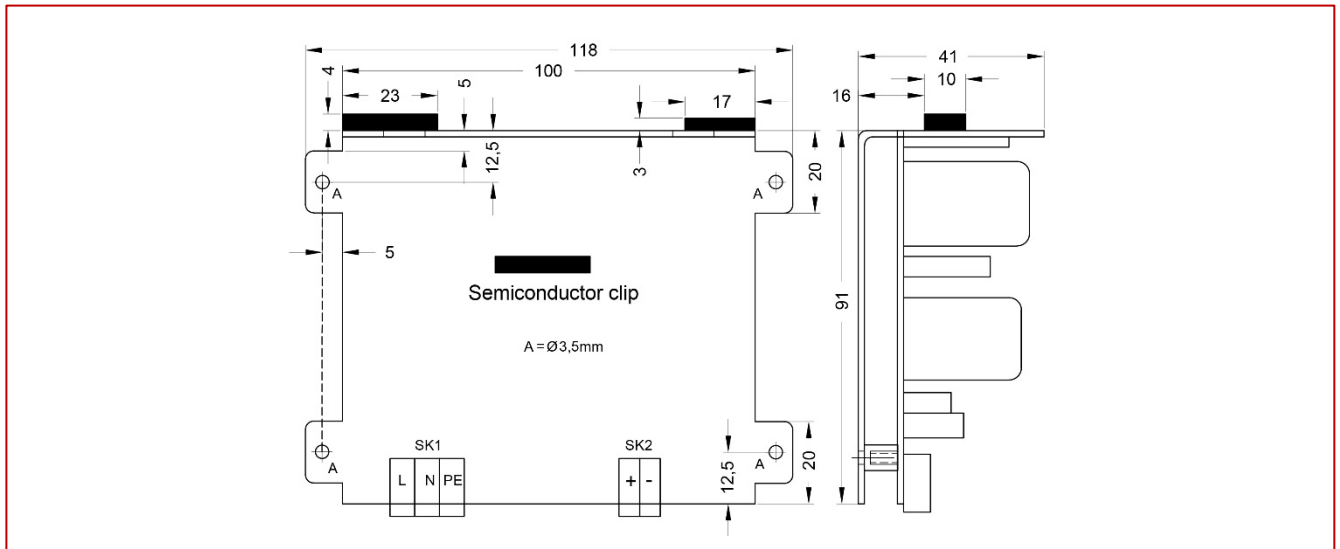

Connections

Clamping Yoke Connector Specifications

	Optional Connection Plugs Input	Optional Connection Plugs Output
Tightening torque min. – max.	0,4 – 0,5Nm (blade 0,6x3,5 PH1 PZ1)	0,4 – 0,5Nm (blade 0,6x3,5 PH1 PZ1)
Touch-safe protection acc. to DIN VDE 0470	Not applicable	Not applicable
Clamping range, min. – max.	0,2 – 4,0mm ² / AWG26 – AWG12	0,2 – 4,0mm ² / AWG26 – AWG12
Solid, H05(07) V-U min. – max.	0,2 – 4,0mm ²	0,2 – 4,0mm ²
Stranded, H05(07) V-U min. – max.	Not applicable	Not applicable
Flexible, H05(07) V-U min. – max.	0,2 – 4,0mm ²	0,2 – 4,0mm ²
w. plastic collar ferrule, DIN 46228 pt 4 min. – max.	0,2 – 2,5mm ²	0,2 – 2,5mm ²
w. wire end ferrule, DIN 46228 pt 1, min. – max.	0,2 – 4,0mm ²	0,2 – 4,0mm ²
Plug gauge in accordance with EN 60999 a x b; ø	2,8 x 2,4mm; 2,5mm	2,8 x 2,4mm; 2,5mm
Pitch (P)	7,50mm	5,08mm

Wire Stripping Length (fine wired)

Nominal Cross Section	Wire End Ferrule	Stripping Length	Wire End Ferrule	Stripping Length
0,25mm ²	H0,25/5	5mm	H0,25/10 HBL	8mm
0,5mm ²	H0,5/6	6mm	H0,5/12 OR	8mm
1,0mm ²	H1,0/6	6mm	H1,0/12 GE	8mm
2,5mm ²	H2,5/12	12mm	H2,5/19D BL	14mm
4,0mm ²	H4,0/12	12mm	H4,0/20 GDR	14mm

The length of ferrules is to be chosen depending on the rated voltage. The outside diameter of the plastic collar should not be larger than the pitch (P)

Ordering Information

Ordering Codes

Product Code	Information	Article Number
OSW00901.024(R2)	24V	3041065007CA
OSW00901.036(R2)	36V	3041065006CA
OSW00901.048(R2)	48V	3041065009CA
OSW00901.060(R2)	60V	3041065010CA
OSW00901.072(R2)	72V	3041065011CA
OSW00901.140(R2)	140V	3041065099CA
Optional Output Connector	Optional, 2poles Clamping Yoke Connector 180° cabling (10pcs per pack)	3520037
Optional Input Connector	Optional, 3poles Clamping Yoke Connector 180° cabling (10pcs per pack)	3520038



Safety regulations: Please read these instructions completely before using the equipment. Keep these instructions on to hand. The device may only be operated by trained specialist staff.

Installation:

- 1) The device is designed for devices and systems that meet the standard requirements for hazardous voltages, power, and fire prevention.
- 2.) Installation and service only by trained specialists. The AC power must be switched off. The work is to be labelled; accidental reconnection of the system must be prevented.
- 3.) Opening the device, its modification, loosening bolts, or operation outside the specified herein specification or in an unsuitable environment, has the immediate loss of warranty to follow. We disclaim any responsibility for any resulting damage to persons or things.
- 4.) Note: The device must not be operated without an upstream circuit breaker (CB). We recommend the use of B-type 8A. It is prohibited to use the unit without PE. It may be necessary upstream device has a power switch.

Warning:

Non-compliance these warnings can result in fire and serious injury or death.

1. Never operate device without PE connection.
2. Before connecting the device to the AC network, make wires free of voltage and ensure that it cannot accidentally switch on.
3. Allow neat and professional cabling.
4. Never open nor try to repair the unit. Inside are dangerous voltages that can cause electrical shock hazard.
5. Avoid metal pieces or other conductive material to fall into the item.
6. Do not operate the device in damp or wet conditions
7. Do not operate the unit under EX-conditions



All parameters base on 15 minutes run-in @ full load / 25°C / 230Vac 50/60Hz, as otherwise stated.