




EST 150 - Series 150W Triple Output DC POWER SUPPLIES

Models	Voltage range	Current range
1)	0 - 20 V	0 - 2.5 A
2)	0 - 20 V	0 - 2.5 A
3)	0 - 10 V	0 - 5 A

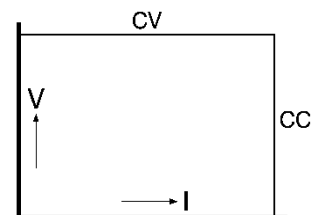

- * 3 independent and floating outputs
- * 20 V outputs tracking or independent (switch selectable)

Features

- Very low output ripple and spikes
- EMC surpasses CE requirements:
low emission & high immunity
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- Designed for a long life at full power

Functionalities

- 3 independent, floating outputs
- Dual voltage tracking or series tracking mode
- 3 output On / Off buttons
- Convection cooling
- Voltage and current control with 10 turn potentiometers

		10 V output	20 V output
Output voltage		0 - 10 V	0 - 20 V
Output current		0 - 5 A	0 - 2.5 A
Input AC	single phase, 48 - 62 Hz rated voltage range rated frequency	90 - 265 V 100 - 240 V 50 / 60 Hz	
	Input current @ 230 VAC power factor, 110 / 230 VAC <i>full load</i>	1 A 0.99 / 0.83	
	internal fuses	4 AT	
	standby input power (Vo=Io=0)	12 W	
	standby input power (Vo=Vmax)	15 W	
Efficiency	AC 230 V input, full load AC 110 V input, full load	81 % 78 %	
Regulation			
Load 0 - 100%	CV	6 mV	5 mV
Line 90 - 265 V AC	CV	0.2 mV	0.5 mV
Load 0 - 100%	CC	1 mA	0.5 mA
Line 90 - 265 V AC	CC	0.2 mA	0.1 mA
Ripple + noise (full load)			
rms (BW=300 kHz)	CV	0.5 mV	0.5 mV
p-p (BW=20 MHz)	CV	8 mV	8 mV
rms (BW=300 kHz)	CC	0.5 mA	0.3 mA
p-p (BW=20 MHz)	CC	4 mA	1 mA
Temp. coeff., per °C	CV CC	5.10 ⁻⁵ 10.10 ⁻⁵	
Stability after 1 hr warm-up during 8 hrs	CV CC	10.10 ⁻⁵ 10.10 ⁻⁵	
<i>t_{amb} = 25 ± 1 °C, Vin = 230 VAC</i>			
Tracking accuracy		0.5%	

Indicators (front panel)	CV-mode, CC-mode, output On/Off, Tracking On/Off
Controls (front panel)	Mains On/Off, CV- and CC-potmeters, Display-Settings button, Output On/Off, Tracking On/Off

	10 V output	20 V output
Recovery time		
recovery within	100 mV	50 mV
di/dt of load step	125 mA/μs	75 mA/μs
output voltage	9 V	18 V
time, @ 50 - 100% load step	100 μs	100 μs
max. deviation	200 mV	200 mV
@ 230 VAC input voltage		
Output impedance		
CV, 0-100 kHz	< 250 mOhm	< 250 mOhm
Pulsating load		
max. tolerable AC component of load current		
f > 1 kHz	2 A rms	2 A rms
f < 1 kHz	5 A peak	2.5 A peak

Insulation input / output creepage / clearance	3750 Vrms (1 min.) 8 mm
input / case output / case	2500 Vrms 600 V DC
Safety	EN 60950 / EN 61010, outputs are SELV
EMC Generic Emission Generic Immunity	EN 61326-1 , class B equipment (for use in domestic establishments) EN 61326-1 , equipment for use in industrial and domestic establishments
Operating Temperature at full load	- 20 to + 50 °C derate output to 75% at 60 °C
Humidity	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
Storage temperature	- 40 to + 85 °C
Thermal protection	Output shuts down in case of insufficient cooling
MTBF	500 000 hrs

Hold-Up time (230 VAC input) Vout = 100% , Iout = 100% Vout = 85% , Iout = 100% Vout = 100% , Iout = 50%	25 ms 30 ms 60 ms
Turn on delay (230 VAC input) after mains switch on	250 ms
Inrush current	10 A with NTC resistor 30 Ohms cold resistance

	10 V output	20 V output
Series operation max. total voltage	600 V	
Parallel operation max. total current	no limit	
Over Voltage Limit (fixed)	max. 13 V	max. 25 V
Potentiometers front panel control with knobs resolution	standard 0.03%	
Meters scale voltage scale current accuracy V-meter accuracy A-meter	3.5 digit 0 - 10.00 V 0 - 5.00 A 0.5% + 2 digits 1% + 2 digits	3.5 digit 0 - 20.0 V 0 - 2.50 A 0.5% + 2 digits 1% + 2 digits




Input Connector	Euro-connector at rear panel 10 Amp / 65 °C IEC320/C14, EN60320/C14
DC Output Terminals	4 mm safety sockets at front-panel
Cooling	Convection cooling
Enclosure degree of protection	IP20
Dimensions (h x w x d)	132 x 222 x 180 mm
Weight	3.5 kg

CV = Constant Voltage
CC = Constant Current


Specifications measured at $t_{amb} = 25 \pm 5$ °C and $V_{in} = 230$ VAC, 50 Hz unless otherwise noted.



Linecord supplied Input connector

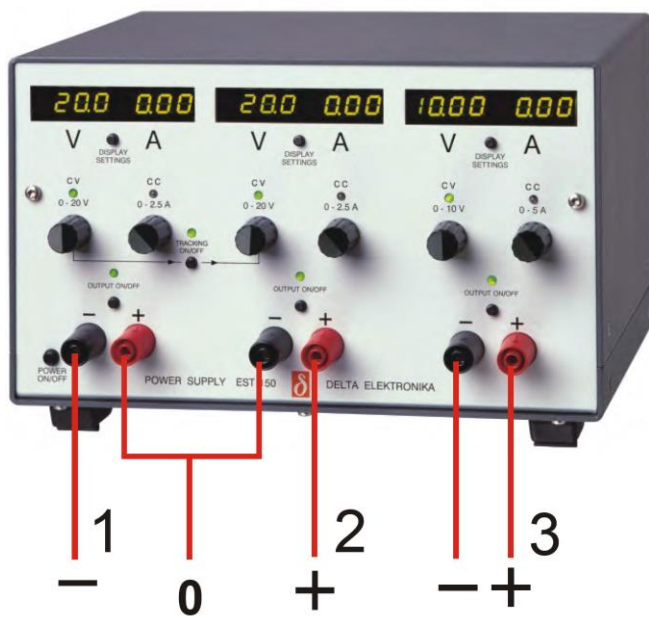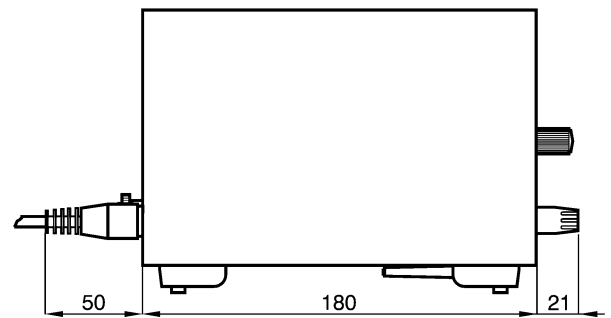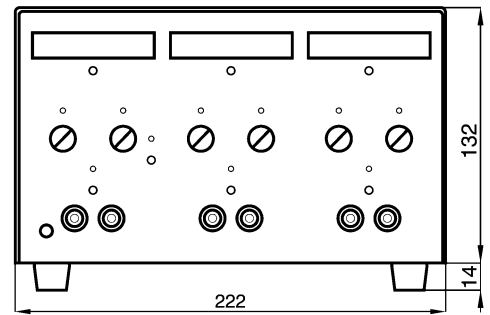

20 V Outputs in **Tracking - Mode**, to create a dual voltage source. Voltage of Output (2) follows the setting for Output (1), current settings still independent.

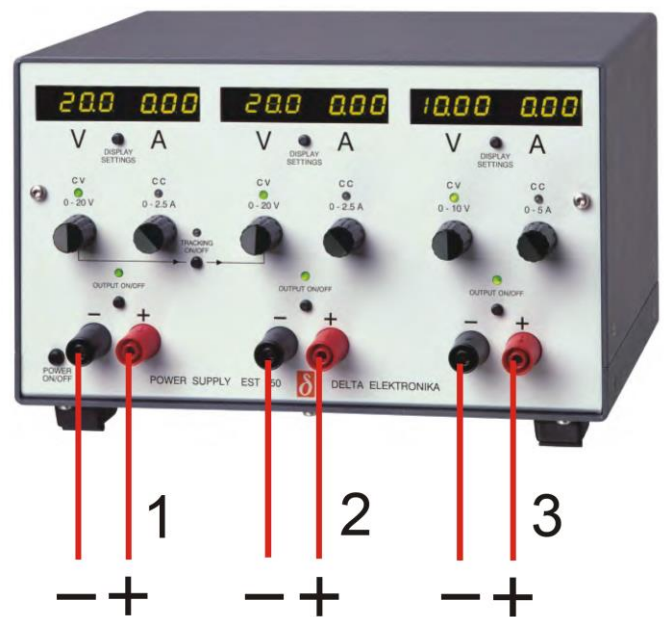

Tracking - Mode off. Three independent voltage / current sources. Outputs are floating.

