



DECKBLATT ZUM ORIGINAL-DATENBLATT DES HERSTELLERS

# 1 - 2KW | DATENBLATT GERÄTE

**HERSTELLER** Polyamp AB  
**PRODUKTSERIE** PC2000-Serie

Ihr direkter Ansprechpartner für Polyamp-Produkte!

Die Ing. Erhard Fischer GmbH ist Ihr zuverlässiger Partner für die Produkte von Polyamp AB. Wir bieten Ihnen nicht nur hochwertigen technischen Support, sondern auch kompetente Beratung und maßgeschneiderte Lösungen für Ihre individuellen Anforderungen.

Ob Standardprodukt, kundenspezifische Geräte oder Schaltschrankbau. Wir freuen uns, Sie bei Ihrer Lösungsfindung mit eingehender Kundenberatung kompetent unterstützen zu können.

Kontaktieren Sie uns für technische Beratung oder ein individuelles Angebot!

Wir freuen uns auf das Gespräch mit Ihnen.



IHR ANSPRECHPARTNER

**Martin Sochor**



+43 2236 42694-40



[powersupply@ing-fischer.at](mailto:powersupply@ing-fischer.at)



**Ing. Erhard Fischer GmbH**



Weissenbach 101 | AT-2371 Hinterbrühl



[www.ing-fischer.at](http://www.ing-fischer.at)



ING. ERHARD FISCHER GMBH

**Immer die passende Lösung für Industrie-  
Stromversorgungen, Heizfolien & Messtechnik**



## PC2000-series 1000 to 2000 W

### INPUT / OUTPUT

- Optimized input voltage ranges
- Input ranges from 20 to 300 Vd.c.
- Single outputs from 24 to 48 Vd.c.
- Inrush current limit
- Reverse input voltage protection

### OPERATION

- Operating temperature range -25 to +55 °C
- High efficiency > 89%
- Convection cooled 1000 W
- Fan cooled up to 1400 to 2000 W

### FEATURES

- Current sharing
- External output voltage sense
- Overvoltage protection OVP
- Alarm circuit with relay
- Inhibit input / Power down
- Output voltage adjustable on frontpanel

### EMC

- EN IEC 61000-6-3, Emission.
- EN IEC 61000-6-2, Immunity.
- EN IEC 61000-4-3, 20 V/m
- EN IEC 61000-4-4, 4 kV.
- EN IEC 61000-4-5 level 2 & 3.
- EN 50121-3-2

| INPUT          |             |             |      |
|----------------|-------------|-------------|------|
| Nominal inputs | Input range | Stop level  | Code |
| 24 Vd.c.       | 20-32 V     | <16.8 Vd.c. | 24   |
| 48 Vd.c.       | 43-60 V     | <33.6 Vd.c. | 48   |
| 110, 127 Vd.c. | 93-150 V    | <77 Vd.c.   | 110  |
| 220, 250 Vd.c. | 187-300 V   | <154 Vd.c.  | 220  |

Other input ranges can be made on demand.

Input range, is the range we guarantee full output performance,  $U_{out} +10\%$ ,  $I_{out} +5\%$ .

The converter works down to the stop levels.

The output voltage might decrease to approx -10% of nominal output at the stop level.

| OUTPUT  |         |             |
|---------|---------|-------------|
| Voltage | Current | Power       |
| 24 V    | 42-58 A | 1000-1400 W |
| 28 V    | 36-50 A | 1000-1400 W |
| 48 V    | 21-42 A | 1000-2000 W |

## OUTPUT RATING & TYPE CODE

| OUTPUT  |         |        | INPUT        |              |               |               |            |
|---------|---------|--------|--------------|--------------|---------------|---------------|------------|
| Voltage | Current | Power  | 20 - 32 V    | 43 - 60 V    | 93 - 150 V    | 187 - 300 V   | Cooling    |
| 24 V    | 42 A    | 1000 W | PC1000 24/24 | PC1000 48/24 | PC1000 110/24 | PC1000 220/24 | Convection |
| 24 V    | 58 A    | 1400 W |              | PC1400 48/24 | PC1400 110/24 | PC1400 220/24 | Fan        |
| 28 V    | 36 A    | 1000 W | PC1000 24/28 | PC1000 48/28 | PC1000 110/28 | PC1000 220/28 | Convection |
| 28 V    | 50 A    | 1400 W |              | PC1400 48/28 | PC1400 110/28 | PC1400 220/28 | Fan        |
| 48 V    | 21 A    | 1000 W | PC1000 24/48 | PC1000 48/48 | PC1000 110/48 | PC1000 220/48 | Convection |
| 48 V    | 42 A    | 2000 W |              | PC2000 48/48 | PC2000 110/48 | PC2000 220/48 | Fan        |

\* NRE might be changed

How to read our product code:

Example PC1000 110/48

PC1000 = Family code

110 = Input voltage code 110

48 = Output voltage 48 V

## FEATURES

### Current Sharing

Current sharing is used to balance the load between up to 10 units working in parallel.

### External output voltage sense

External sense is used when the voltage regulation at the load is critical. See output data page 3. The sense can compensate voltage drops up to 5% of the nominal voltage.

### Alarm circuit

The alarm relay switches to "ALARM" state if:

\* The output voltage is not within -10 to +15% of nominal output voltage.

\* The converter is overheated

### Over voltage protection OVP

A second regulation circuit takes over in case the main regulation fails. The output voltage is limited to approximately +15% over nominal output voltage.

### Inhibit input / Power down

The converter will shutdown if the inhibit input is short-circuit by a relay or electrical switch. The current through the short-circuit is 20mA. Note that there is no electrical isolation between the inhibit and the output.

### Inrush current limit and Reverse voltage protection

All models have an inrush current limit circuit. In case the input is connected in reverse voltage the converter will not start. The reverse voltage do not damage the input of the converter.

### Electrical Safety Installation Class

The PC2000 series can be installed in different networks, see page 4

## OPTIONAL FEATURES

### Series diode on output

Specify series diode output when the output is connected in parallel with other power supplies to achieve redundancy. The output is derated 10% on 24V and 5% on 48V.

### Conformally coating

For use in weather protected area with high ambient humidity or large temperature gradients producing condensation.

### Train input

Input voltage range according to train standard EN50155 and IEC60571. See T-input below.

## T-INPUT RANGES FOR MOBILE APPLICATIONS

| CODE | CONTINUOUS RANGE | UIN 0.1S-S2        |
|------|------------------|--------------------|
| 24T  | 16.8 - 30Vd.c.   | 14.4 - 33.6 Vd.c.  |
| 48T  | 33.6 - 60 Vd.c.  | 28.8 - 67.2 Vd.c.  |
| 72T  | 50.4 - 90 Vd.c.  | 43.2 - 100.8 Vd.c. |
| 110T | 77 - 137.5 Vd.c. | 66 - 154 Vd.c.     |

## GENERAL DATA / INPUT DATA

| LABEL                                                | VALUE                             |
|------------------------------------------------------|-----------------------------------|
| Design topology                                      | Push-Pull                         |
| Switching frequency                                  | 60 kHz                            |
| Emission / Immunity                                  | See page 4                        |
| Safety EN IEC 60950-1:2001                           | See page 4                        |
| Max. accepted input ripple <sup>1</sup><br>50-400 Hz | 2 % of nominal voltage            |
| Input power at no load                               |                                   |
| Input code 24                                        | <8 W                              |
| Input code 48, 110                                   | <17 W                             |
| Input code 220                                       | <21 W                             |
| <b>Reverse input voltage protection</b>              | In start up sequence <sup>2</sup> |
| Inrush current limit                                 | Yes <10 x Inom                    |
| Dimensions (D x W x H)                               | 285 x 420 x 87 mm                 |
| Weight                                               | 8.5 kg                            |
| Power connectors                                     | 1 - 35 mm <sup>2</sup>            |
| Signal connectors                                    | 0,25 - 2,5 mm <sup>2</sup>        |

1. Higher ripple affects the input, contact factory.

2. The conveter do not start at reverce voltage.

3. The output ripple might increase to 0.5% RMS of Vout, when EN IEC 61000-4-3, 20 V/m test is applied.

4. Lowest efficiency measured within the whole input voltage range at 100% load.

5. Contact factory for derating as depends on model.  
The alarm relay can not be used at +70 °C

## OUTPUT DATA

| LABEL                                                                                        | VALUE                          |
|----------------------------------------------------------------------------------------------|--------------------------------|
| Source regulation                                                                            | 0.1%                           |
| Load regulation (0 to 100% load)<br>with sense connected                                     | 0.2%                           |
| Load regulation (0-100% load)                                                                | 0.5%                           |
| Transient recovery time for 10 to 90% load<br>step to within 3% of nominal output voltage.   | <3 ms                          |
| Output ripple (120 kHz) Vp-p <sup>3</sup>                                                    | Typ. 30 mV                     |
| Input ripple attenuation to output<br>(50 to 400 Hz)                                         | 150:1                          |
| Emission / Immunity                                                                          | See page 4                     |
| Temperature coefficient                                                                      | 0.02%/°C                       |
| Min output adjustment range<br>adjustable with a 15 turn potentiometer                       | 95 - 110%                      |
| Current limit, rectangular                                                                   | 105%                           |
| Remote sense                                                                                 | Yes                            |
| Soft start                                                                                   | Yes                            |
| Alarm relay rating (a.c. & d.c.)                                                             | 30 V 300 mA                    |
| Start-up time                                                                                | < 3 s                          |
| Hold-up time, contact factory                                                                | 2 - 25 ms                      |
| Efficiency <sup>4</sup>                                                                      | 89 - 93 %                      |
| Operating temperature range at 100% load.<br>(Convection cooling) with derating <sup>5</sup> | -25 to +55 °C<br>-25 to +70 °C |
| Storage temperature range                                                                    | -40 to +85 °C                  |

## MECHANICAL DRAWING



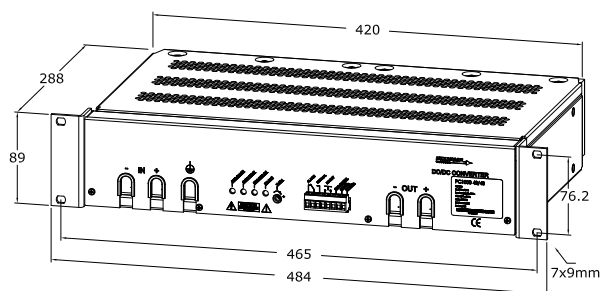


Figure 1. Dimensions

Weight: 8.5 kg




Single unit PC1000/2000 mounted as  
one 19" unit using standard brackets  
L89-3



4 units PC1000/2000 mounted  
vertically, using standard L89-3  
brackets and L480-2 (Optional).

PC1000/2000 rackmounted 19" 2U.  
Using standard brackets L89-3

PC1000/2000 wall mounted.  
Using mounting brackets L216-1  
(Optional)

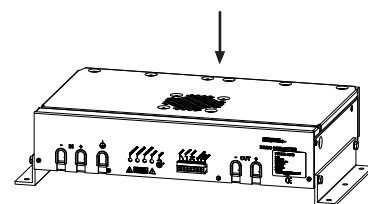

PC1000/2000 wall mounted.  
Using mounting brackets L100-1  
(Optional)

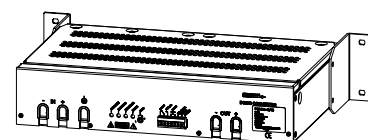


Figure 2. 19"-rack mounting

Figure 3. Wall mounting

## CE MARK

PC2000 meets the requirements defined by CE mark as an apparatus.

PC2000 meets requirements of EMC directive and low voltage directive (LVD) and RoHS II directive.

The PC2000 family is in respect to EMC, a stand alone unit can also be installed in any other environment by a professional installer.

Please note that product standards can demand different levels or other basic standard tests. We test according to levels below. For higher levels or other tests, contact factory.

The PC2000 use the safety standard EN IEC 60950-1:2001 for the EMC it meets the requirements of EN IEC 61204-3, EN 50121-2-3:2000, IEC 62236-2-3:2003 and the generic EMC standards.  
EN IEC 61000-6-2 (Immunity)  
EN IEC 61000-6-3 (Emission)

## SAFETY STANDARD EN/IEC 60950

| NETWORK           | INSTALLATION CLASS | INPUT CODE |
|-------------------|--------------------|------------|
| Primary circuit   | class II (1)       | 110, 220   |
| Primary circuit   | class I (2)        | 110-220    |
| Secondary circuit | class I (2)        | all        |
| SELV circuit      | class I (2)        | 24, 48     |

1. Pollution degree 2.

2. Pollution degree 3.

| ISOLATION TESTABLE LEVELS         |                                                | TEST VOLTAGE                        |
|-----------------------------------|------------------------------------------------|-------------------------------------|
| Input / Output                    | Input code: 24, 48, 72<br>Input code: 110, 220 | 2.5 kVd.c.<br>3 kVa.c. / 4.3 kVd.c. |
| Input / Alarm                     | Input code: 24, 48, 72<br>Input code: 110, 220 | 2.5 kVd.c.<br>3 kVa.c. / 4.3 kVd.c. |
| Input / Case                      | Input code: 24, 48, 72<br>Input code: 110, 220 | 2.5 kVd.c.<br>2.5 kVa.c. / 4 kVd.c. |
| Alarm / Case                      | Input code: 24, 48, 72<br>Input code: 110, 220 | 2 kVd.c.<br>3 kVa.c. / 4.3 kVd.c.   |
| Alarm / Case                      |                                                | 2.5 kVd.c.                          |
| Output / Case on <75 Vd.c. output |                                                | 2.5 kVd.c.                          |
| Output / Alarm                    |                                                | 2.5 kVd.c.                          |

## EMC

| EMC STANDARDS                                                    | EMC PERFORMANCE         |                                                            |
|------------------------------------------------------------------|-------------------------|------------------------------------------------------------|
| <b>Emission standards</b>                                        | <b>EN IEC 61000-6-3</b> | <b>Commercial and light-industrial environments</b>        |
|                                                                  | <b>Input</b>            | <b>Output</b>                                              |
| EN 55016 CISPR16 (0.15-30 MHz)                                   | OK                      | OK                                                         |
| EN 55016 CISPR16 (30-1000 MHz)                                   | OK                      |                                                            |
| <b>Immunity standards</b>                                        | <b>EN IEC 61000-6-2</b> | <b>Industrial environments</b>                             |
| EN IEC 61000-4-2                                                 | 8 kV / 15 kV            |                                                            |
| EN IEC 61000-4-3, see note 3                                     | 20 V/m AM-Modulated     |                                                            |
| EN IEC 61000-4-4                                                 | 4 kV                    | 4 kV                                                       |
| EN IEC 61000-4-5, Input code 24, 48, 72                          | 0.5 kV / 1 kV           | 0.5 kV / 1 kV                                              |
| EN IEC 61000-4-5, Input code 110 <sup>4</sup> , 220 <sup>4</sup> | 1 kV / 2 kV             | 0.5 kV / 1 kV                                              |
| EN IEC 50121-3-2                                                 | 1 kV / 2 kV             | 0.5 kV / 1 kV                                              |
| EN IEC 61000-4-6                                                 | 10 V <sub>RMS</sub>     | 10 V <sub>RMS</sub>                                        |
| EN IEC 61000-4-8                                                 | 30 A/m                  |                                                            |
| EN IEC 61000-4-10                                                | Not sensitive           |                                                            |
|                                                                  |                         | opt. EN 55022 level B                                      |
|                                                                  |                         | Enclosure test                                             |
|                                                                  |                         | Contact / air, Enclosure test                              |
|                                                                  |                         | Output ripple can increase to 0.5% of Vout, Enclosure test |
|                                                                  |                         | Line-line 2 Ω / Line-case 12 Ω                             |
|                                                                  |                         | see note 4                                                 |
|                                                                  |                         | Line-line 42 Ω / Line-case 42 Ω                            |
|                                                                  |                         | AM-Modulated                                               |
|                                                                  |                         | Enclosure test                                             |
|                                                                  |                         | Enclosure test                                             |

3. 10 V/m do not show any influence.

4. Higher level 2 kV / 4 kV with external filters, contact factory.

We use the EMC product standard "Low voltage power supplies DC output" EN 61204-3 as base for measurement principles. The Immunity EMC levels are elevated in order to comply to EN 50121-3-2 (IEC 62236-3-2) Railway application: Rolling stock – Apparatus, and EN 50121-4 (IEC 62236-4), Railway application: Signaling and telecommunication apparatus. Also to meet relevant parts of IEC 61000-6-5 Generic Standards – Immunity for power stations and substation environments.



### HEAD OFFICE

Polyamp AB  
Box 925  
SE-191 29 Sollentuna  
Sweden  
Phone: +46 8 594 693 00  
Telefax: +46 8 594 693 05



- A secure part of your system

### SALES OFFICE

Polyamp AB  
Box 229  
SE-597 25 Åtvidaberg  
Sweden  
Phone: +46 120 854 10  
Telefax: +46 120 854 05  
Email: info@polyamp.se  
www.polyamp.com



### SALES OFFICE

Switch Craft S.A  
Ruel bel Air 63  
CH-2300 La Chaux-de-fonds  
Switzerland  
Phone: +41 32 96 78800  
Telefax: +41 32 96 78809