



DECKBLATT ZUM ORIGINAL-DATENBLATT DES HERSTELLERS

400-500W | DATENBLATT GERÄTE

HERSTELLER Polyamp AB
PRODUKTSERIE PU500-Serie

Ihr direkter Ansprechpartner für Polyamp-Produkte!

Die Ing. Erhard Fischer GmbH ist Ihr zuverlässiger Partner für die Produkte von Polyamp AB. Wir bieten Ihnen nicht nur hochwertigen technischen Support, sondern auch kompetente Beratung und maßgeschneiderte Lösungen für Ihre individuellen Anforderungen.

Ob Standardprodukt, kundenspezifische Geräte oder Schaltschrankbau. Wir freuen uns, Sie bei Ihrer Lösungsfindung mit eingehender Kundenberatung kompetent unterstützen zu können.

Kontaktieren Sie uns für technische Beratung oder ein individuelles Angebot!

Wir freuen uns auf das Gespräch mit Ihnen.



IHR ANSPRECHPARTNER

Martin Sochor



+43 2236 42694-40



powersupply@ing-fischer.at



Ing. Erhard Fischer GmbH



Weissenbach 101 | AT-2371 Hinterbrühl



www.ing-fischer.at



ING. ERHARD FISCHER GMBH

**Immer die passende Lösung für Industrie-
Stromversorgungen, Heizfolien & Messtechnik**



PU500-series 400 to 500 W

INPUT / OUTPUT

- Optimized input voltage ranges
- Input ranges from 18 to 300 Vd.c.
- Single outputs from 24 to 60 Vd.c.
- Reverse input voltage protection

FEATURES

- Overvoltage protection OVP
- Over/Under voltage alarm relay
- Remote sense
- Inhibit input / Power down
- Output voltage adjustable on frontpanel.

OPERATION

- Operating temperature range -25 to +55 °C
- High efficiency > 88%
- Fully encapsulated, meets IP20 as standard.
- Convection cooled

EMC

- EN IEC 61000-6-3, Emission.
- EN IEC 61000-6-2, Immunity.
- EN IEC 61000-4-4, 4 kV.
- EN IEC 61000-4-5 level 2 & 3.

INPUT		
Nominal inputs	Input range	Code
24 Vd.c.	18-32 V	24
48 Vd.c.	38-60 V	48
110, 127 Vd.c.	88-150 V	110
220, 250 Vd.c.	175-300 V	220

Input voltages meeting train standard EN50155 IEC60571, can be made on demand.

OUTPUT		
Voltage	Current	Power
24 V	16.7-20.9 A	400-500 W
28 V	14.3-17.9 A	400-500 W
36 V	11.2-13.9 A	400-500 W
48 V	8.4-10.5 A	400-500 W
60 V	6.7-8.4 A	400-500 W

OUTPUT RATING & TYPE CODE

OUTPUT			INPUT			
Voltage	Current	Power	18 - 32 V	38 - 60 V	88 - 150 V	175 - 300 V
24 V	16.7 A	400 W	PU500 24/24			
24 V	20.9 A	500 W		PU500 48/24	PU500 110/24	PU500 220/24
28 V	14.3 A	400 W	PU500 24/28			
28 V	17.9 A	500 W		PU500 48/28	PU500 110/28	PU500 220/28
36 V	11.2 A	400 W	PU500 24/36			
36 V	13.9 A	500 W		PU500 48/36	PU500 110/36	
48 V	8.40 A	400 W	PU500 24/48			
48 V	10.5 A	500 W		PU500 48/48	PU500 110/48	PU500 220/48
60 V	6.70 A	400 W	PU500 24/60			
60 V	8.40 A	500 W			PU500 110/60	PU500 220/60

How to read our product code: Example PU500 24/48

PU500 = Family code

24 = input voltage code 24

48 = Output voltage 48 V

FEATURES

Overvoltage protection OVP

The output voltage is limited to 15 % over nominal output voltage by an extra regulation circuit.

External output voltage sense

External sense is used when the voltage regulation at the load is critical. The sense can compensate voltage drops up to 5% of the nominal voltage.

Remote sense

External sense is used when the voltage regulation at the load is critical. The sense can compensate voltage drops up to 5% of the nominal voltage.

Over / Under voltage alarm

The built in relay changes to alarm state if the converter output voltage is not within 90 to 115 % of nominal output. The user can select NO or NC relay function. The relay rating is 30 V 0.5 A (d.c. or a.c.)

Inhibit input / Power down

This input allows remote start and shutdown of the converter by a signal voltage of 5 to 12V. Max 35mA.

OPTIONAL FEATURES

Output with series diode

Use the series diode output when the output is connected in parallel with other power supplies to achieve redundancy. The output current is derated with 10% on 24 to 48 V outputs.

Inrush current limit with NTC

Reduces the inrush current during start up. The input voltage range will be affected. Only available on 110 & 220 input code.

Conformally coating

For environment with high non condensing humidity max 85 % RH.

Train input

Input voltage range according to train standard EN 50155 and IEC 60571. For train 36V use standard B-range and for 110V use standard C-range.

Mounting brackets L216-1

See figure 3.

19" Rack mounting set

To mount two PU500 together to form a full 19" rack unit, see figure 2.

19" Rack mounting bracket L86-3

To mount one PU500 to form a full 19" rack unit, see figure 2.

Empty box

To produce a full 19"-rack unit. Includes 19"-rack mounting set, see middle section of figure 2. (One converter replaced by empty box.)

GENERAL DATA / INPUT DATA

LABEL	VALUE
Design topology	Push-Pull
Switching frequency	40 kHz
Emission / Immunity	See page 4
Safety EN IEC 60950	Class I
Max. accepted input ripple ¹ 50-400 Hz	1 % of nominal voltage
Input power at no load	
Uout <36 V	Max 10 W
Uout 36-50 V	Max 12 W
Uout 60 V	Max 17 W
Reverse input voltage protection	
24, 48 input code	Parallel diode
110, 220 input code	Series diode
Dimensions (D x W x H)	232 x 210 x 86 mm
Weight	4.2 kg
Power connectors	0,5 - 4 mm ²
Signal connectors	0,25 - 2,5 mm ²

1. Higher ripple affects the input, contact factory

2. The output ripple might increase to 0.5% RMS of Vout, when EN IEC 61000-4-3, 10 V/m test is applied.

3. Lowest efficiency measured within the whole input voltage range at 100% load.

4. Contact factory for derating as depends on model.
The alarm relay can not be used at +70 °C

OUTPUT DATA

LABEL	VALUE
Source regulation	0.1%
Load regulation (0 to 100% load)	0.2%
Transient recovery time for 10 to 90% load step to within 3% of nominal output voltage.	<3 ms
Output ripple (80 kHz) ²	Typ. 15 mV p-p
Input ripple attenuation to output (50 to 400 Hz)	150:1
Emission / Immunity	See page 4
Temperature coefficient	0.02%/°C
Min output adjustment range adjustable with a 15 turn potentiometer	95 - 110%
Current limit, rectangular	105%
Remote sense	Yes
Soft start	Yes
Start-up time	1 s
Hold-up time, contact factory	2 - 25 ms
Efficiency ³	88 - 91 %
Operating temperature range at 100% load. (Convection cooling) with derating ⁴	-25 to +55 °C -25 to +70 °C
Storage temperature range	-40 to +85 °C

MECHANICAL DRAWING



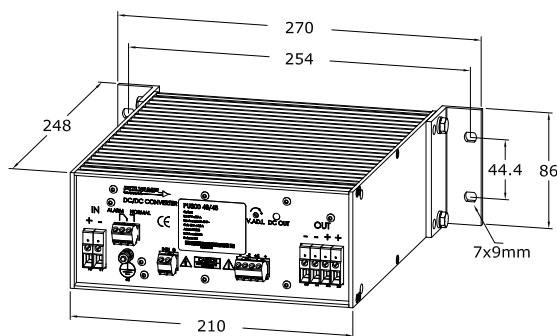


Figure 1. Dimensions


Weight: 4.2 kg



Single unit PU300/500 mounted as
one 19" unit using L86-3 brackets
(Optional).



2 units PU300/500 mounted side by
side forming one 19" unit, using 19"
rack mounting set (Optional).

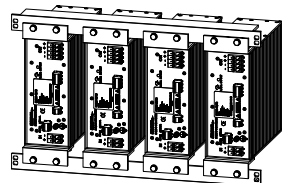

4 units PU300/500 mounted vertically,
using standard L86-1 brackets and
L480-1 (Optional).

PU300/500 wall mounted.
Using standard brackets L86-1

PU300/500 wall mounted.
Using mounting brackets L216-1
(Optional)




Figure 2. 19"-rack mounting

Figure 3. Wall and chassis mounting

CE MARK

PU500 meets the requirements defined by CE mark as apparatus.

PU500 meets requirements of EMC directive and low voltage directive (LVD) and RoHS II directive.

The PU500 family is in respect to EMC, a stand alone unit can also be installed in any other environment by a professional installer.

Please note that product standards can demand different levels or other basic standard tests. We test according to levels below. For higher levels or other tests, contact factory

SAFETY STANDARD EN/IEC 60950

ISOLATION TESTABLE LEVELS		TEST VOLTAGE
Input / Output	Input code: 24, 48	2 kVd.c.
	Input code: 110, 220	2.5 kVa.c. / 4 kVd.c.
Input / Signal*	Input code: 24, 48	2 kVd.c.
	Input code: 110, 220	2.5 kVa.c. / 4 kVd.c.
Input / Case	Input code: 24, 48	2 kVd.c.
	Input code: 110, 220	2.5 kVa.c. / 4 kVd.c.
Output / Case all outputs		2 kVd.c.
Output / Signal*		2 kVd.c.
Case / Signal*	Input code: 24, 48	2 kVd.c.
	Input code: 110, 220	2.5 kVa.c. / 4 kVd.c.

* Signal = Alarm + Inhibit

EMC

EMC STANDARDS	EMC PERFORMANCE	
Emission standards	EN IEC 61000-6-3	Commercial and light-industrial environments
	Input	Output
EN 55016 CISPR16 (0.15-30 MHz)	OK	OK
EN 55016 CISPR16 (30-1000 MHz)	OK	
Immunity standards	EN IEC 61000-6-2	Industrial environments
EN IEC 61000-4-2	8 kV / 15 kV	
EN IEC 61000-4-3	20 V/m AM-Modulated	
EN IEC 61000-4-4	4 kV	4 kV
EN IEC 61000-4-5, Input code 24, 48	$\pm 0.5 \text{ kV} / \pm 1 \text{ kV}$	$\pm 0.5 \text{ kV} / \pm 1 \text{ kV}$
EN IEC 61000-4-5, Input code 110 ¹ , 220 ¹	$\pm 1 \text{ kV} / \pm 2 \text{ kV}$	$\pm 0.5 \text{ kV} / \pm 1 \text{ kV}$
EN 50121-3-2 IEC 62236-3-2	$\pm 1 \text{ kV} / \pm 2 \text{ kV}$	$\pm 1 \text{ kV} / \pm 2 \text{ kV}$
EN IEC 61000-4-6	10 V _{RMS}	10 V _{RMS}
EN IEC 61000-4-8	Not sensitive	
EN IEC 61000-4-10	Not sensitive	
		opt. EN 55022 level B
		Enclosure test
		Contact / air, Enclosure test
		Output ripple can increase to 0.5% of Vout Enclosure test
		Line-line 2 Ω / Line-case 12 Ω
		Line-line 2 Ω / Line-case 12 Ω
		Line-line 42 Ω / Line-case 42 Ω
		AM-Modulated
		Enclosure test
		Enclosure test

1. Higher level 2 kV / 4 kV with external filters, contact factory.

We use the EMC product standard "Low voltage power supplies DC output" EN 61204-3 as base for measurement principles. The Immunity EMC levels are elevated in order to comply to EN 50121-3-2 (IEC 62236-3-2) Railway application: Rolling stock – Apparatus, and EN 50121-4 (IEC 62236-4) Railway application: Signaling and telecommunication apparatus. Also to meet relevant parts of IEC 61000-6-5 Generic Standards – Immunity for power stations and substation environments.



HEAD OFFICE

Polyamp AB
Box 925
SE-191 29 Sollentuna
Sweden
Phone: +46 8 594 693 00
Telefax: +46 8 594 693 05

SALES OFFICE

Polyamp AB
Box 229
SE-597 25 Åtvidaberg
Sweden
Phone: +46 120 854 10
Telefax: +46 120 854 05

SALES OFFICE

Switch Craft S.A
Ruel bel Air 63
CH-2300 La Chaux-de-fonds
Switzerland
Phone: +41 32 96 78800
Telefax: +41 32 96 78809

Email: info@polyamp.se
www.polyamp.com