



DECKBLATT ZUM ORIGINAL-DATENBLATT DES HERSTELLERS

# 260-500W | DATENBLATT GERÄTE

**HERSTELLER** Polyamp AB  
**PRODUKTSERIE** PM500-Serie

Ihr direkter Ansprechpartner für Polyamp-Produkte!

Die Ing. Erhard Fischer GmbH ist Ihr zuverlässiger Partner für die Produkte von Polyamp AB. Wir bieten Ihnen nicht nur hochwertigen technischen Support, sondern auch kompetente Beratung und maßgeschneiderte Lösungen für Ihre individuellen Anforderungen.

Ob Standardprodukt, kundenspezifische Geräte oder Schaltschrankbau. Wir freuen uns, Sie bei Ihrer Lösungsfindung mit eingehender Kundenberatung kompetent unterstützen zu können.

Kontaktieren Sie uns für technische Beratung oder ein individuelles Angebot!

Wir freuen uns auf das Gespräch mit Ihnen.



IHR ANSPRECHPARTNER

**Martin Sochor**



+43 2236 42694-40



[powersupply@ing-fischer.at](mailto:powersupply@ing-fischer.at)



**Ing. Erhard Fischer GmbH**



Weissenbach 101 | AT-2371 Hinterbrühl



[www.ing-fischer.at](http://www.ing-fischer.at)



ING. ERHARD FISCHER GMBH

**Immer die passende Lösung für Industrie-  
Stromversorgungen, Heizfolien & Messtechnik**



## PM500-series 260 to 500 W

### INPUT / OUTPUT

- Optimized input voltage ranges
- Input ranges from 20 to 300 Vd.c.
- Single outputs from 13.2 to 110 Vd.c.
- Reverse input voltage protection
- Input EN 50155 IEC 60571

### FEATURES

- Overvoltage protection OVP
- Extra output with series diode
- Over/Under voltage alarm with relay output
- Output voltage adjustable from outside

### OPERATION

- Operating temperature range -25 to +70 °C
- High efficiency.
- Fully encapsulated, meets IP20 as standard.
- Convection cooled.

### EMC

- EN IEC 61000-6-3, Emission.
- EN IEC 61000-6-2, Immunity.
- EN IEC 61000-4-4, 4 kV.
- EN IEC 61000-4-5 level 2 & 3.
- EN60950-1
- 2011/65/EC RoHS directive

| INPUT                    |             |             |      |
|--------------------------|-------------|-------------|------|
| Nominal inputs           | Input range | Stop level  | Code |
| 48 Vd.c.                 | 43-60 V     | < 33 Vd.c.  | 48   |
| 24, 48 Vd.c.             | 20-60 V     | < 17 Vd.c.  | 48B  |
| 110, 127 Vd.c.           | 93-150 V    | < 77 Vd.c.  | 110  |
| 72, 96, 110, 127 Vd.c.   | 50-150 V    | < 50 Vd.c.  | 110C |
| 220, 250 Vd.c.           | 187-300 V   | < 154 Vd.c. | 220  |
| 110, 127, 220, 250 Vd.c. | 100-300 V   | < 100 Vd.c. | 220D |

| OUTPUT  |         |       |
|---------|---------|-------|
| Voltage | Current | Power |
| 13.2 V  | 20.0 A  | 260 W |
| 24 V    | 20.0 A  | 500 W |
| 48 V    | 10.5 A  | 500 W |
| 110 V   | 4.5 A   | 500 W |

## OUTPUT RATING & TYPE CODE

| OUTPUT  |         |       | INPUT     |                 |                 |
|---------|---------|-------|-----------|-----------------|-----------------|
| Voltage | Current | Power | 20 - 60 V | 50 - 150 V      | 100 - 300 V     |
| 13.2 V  | 20.0 A  | 260 W |           | PM260 110C/13.2 | PM260 220D/13.2 |

| OUTPUT  |         |       | INPUT       |                            |                            |
|---------|---------|-------|-------------|----------------------------|----------------------------|
| Voltage | Current | Power | 43 - 60 V   | 93 - 150 V                 | 187 - 300 V                |
| 24 V    | 20.0 A  | 500 W | PM500 48/24 | PM500 110/24               | PM500 220/24               |
| 28 V    | 15.0 A  | 420 W |             | PM500 110T/28 <sup>1</sup> | PM500 220T/28 <sup>2</sup> |
| 48 V    | 10.5 A  | 500 W |             | PM500 110/48               | PM500 220/48               |
| 110 V   | 4.5 A   | 500 W |             | PM500 110/110              | PM500 220/110              |

Train Inputs

1) 110T = 77 - 150 Vd.c.

2) 220T = 154 - 300 Vd.c.

How to read our product code: Example PM500 110/24

PM500 = Family code

110 = input voltage code 110

24 = Output voltage 24V

## FEATURES

### Overvoltage protection OVP

The output voltage is limited to 15 % over nominal output voltage by an extra regulation circuit.

### Extra output with series diode

Use the series diode output when the output is connected in parallel with other power supplies to achieve redundancy.

### Over / Under voltage alarm

The built in relay changes to alarm state if the converter output voltage is not within 90 to 115 % of nominal output. The user can select NO or NC relay function. The relay rating is 30 V 0.3 A (d.c. or a.c.), for higher voltage please contact Polyamp.

### Inrush current limit

Reduce the inrush current during start up. the input voltage range will be affected.

### Over temperature shutdown protection

The unit switch-off and restart with hysteresis. Red LED indication and alarm.

### Operating temperature range

The PM500 series is rated to +55°C @ 100% load and continuous operation. However PM500 is designed for operation up to +70°C with derating. Temporary temperature rise e.g. as described in EN 50155 T3 up to +85°C can be accepted as the cooling system has a thermal inertia. -40°C is optional as we need to test each batch.

## OPTIONAL FEATURES

### Train input

Input voltage range according to train standard EN 50155 and IEC 60571, see train T-inputs page 3.

### Current Share, option CS

Passive current share - virtual series resistor

### Conformally coating, option I

For environment with high non condensing humidity max 98 % RH.

### -40 or +70 °C operating temperature

For temperature extensions like -40°C, +70°C and T3 +85°C 10 min, please contact factory, as rating depends on model.

### EN IEC 61000-4-5 level 4

External varistor + surge arrester mounted from pole to ground. With this filter the input meets level 4 of EN IEC 61000-4-5 (+/-2 kV line to line, 4 kV line to ground)

### Mounting brackets L214-2

See figure 4.

### Mounting brackets L58-1

See figure 4.

### 19" frontpanel 2U for two units

To mount two PM500 together to form a full 19" rack unit, see figure 3.

### 19" frontpanel 2U for one unit

To mount one PM500 to form a full 19" rack unit, see figure 3.

### DIN-rail mounted

Using DIN-Rail holder, see figure 4

## GENERAL DATA / INPUT DATA

| LABEL                                                | VALUE                             |
|------------------------------------------------------|-----------------------------------|
| Design topology                                      | Push-Pull                         |
| Switching frequency                                  | 200 kHz                           |
| Emission / Immunity                                  | See page 4                        |
| Safety EN IEC 60950                                  | Class I                           |
| Max. accepted input ripple <sup>1</sup> 0-400 Hz     | 2 % of nom. voltage               |
| Input power at no load                               | Typ 10 W                          |
| Reverse input voltage protection                     | In start up sequence <sup>2</sup> |
| <b>Vibration and shock</b>                           |                                   |
| EN/IEC 61373 Body mounted                            | Class B                           |
| IEC 60721-3-5 Ground vehicle installation            | Class 5M2                         |
| IEC 60068-2-27: 2008 Bump                            | 30 g 6 ms                         |
| IEC 60068-2-64: 2008 Random vibration                | 1.68 gRMS                         |
| Fire Protection EN 45545-2 4.3.2 rule 1 and figure 1 | HL1, HL2 and HL 3                 |
| Dimensions (D x W x H)                               | 194 x 214 x 58 mm                 |
| Weight                                               | 2.4 kg                            |
| Power connectors                                     | 0,25 - 4 mm <sup>2</sup>          |
| Signal connectors                                    | 0,25 - 2,5 mm <sup>2</sup>        |

1. Higher ripple affects the input, contact factory

2. The converter does not start reverse voltage.

## OPTIONAL T-INPUTS

| DC INPUTS MOBILE  |                  |      |
|-------------------|------------------|------|
| Uin 0.1s-S2       | Continuous range | Code |
| 28.8 - 67.2 Vd.c. | 33.6 - 60 Vd.c.  | 48T  |
| 66 - 154 Vd.c.    | 77 - 150 Vd.c.   | 110T |
| 132 - 308 Vd.c.   | 154 - 300 Vd.c.  | 220T |

Input voltage range according to train standard  
EN 50155 and IEC 60571

## OUTPUT DATA

| LABEL                                                                                         | VALUE                          |
|-----------------------------------------------------------------------------------------------|--------------------------------|
| Source regulation                                                                             | 0.1 %                          |
| Load regulation (0 to 100 % load)                                                             | < 0.2 V                        |
| Transient recovery time for 10 to 90 % load step to within 3 % of nominal output voltage.     | < 3 ms                         |
| Output ripple (200 kHz) <sup>3</sup>                                                          | 30 mV p-p                      |
| Input ripple attenuation to output (50 to 400 Hz)                                             | 500:1 or -54 dB                |
| Emission / Immunity                                                                           | See page 4                     |
| Temperature coefficient                                                                       | 0.02 % / °C                    |
| Min output adjustment range adjustable with a 15 turn potentiometer                           | 95 - 110 %                     |
| Current limit, rectangular                                                                    | 105 %                          |
| Remote sense                                                                                  | No                             |
| Soft start                                                                                    | Yes                            |
| Start-up time                                                                                 | < 1 s                          |
| Hold-up time, contact factory                                                                 | 2 - 25 ms                      |
| Efficiency <sup>4</sup>                                                                       | > 88 %                         |
| Operating temperature range at 100 % load.<br>(Convection cooling) with derating <sup>5</sup> | -25 to +55 °C<br>-40 to +70 °C |
| Storage temperature range                                                                     | -40 to +85 °C                  |

3. The output ripple might increase to 1 % RMS of Vout, when  
EN IEC 61000-4-3, 20V/m test is applied.

4. Lowest efficiency measured within the whole input voltage range  
at 100 % load.

5. Contact factory for derating as it depends on model.

## MECHANICAL DRAWING

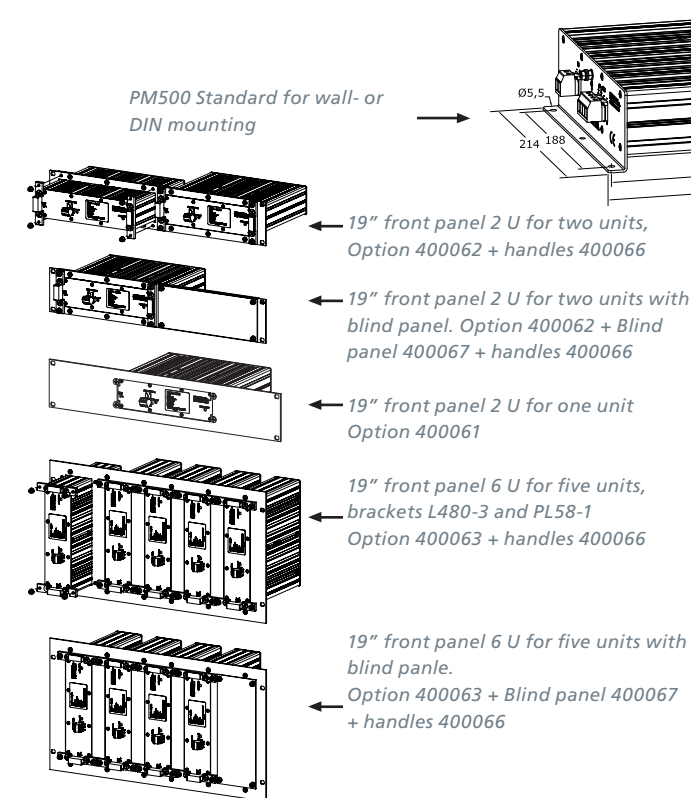


Figure 2. 19"-rack mounting PM500 R

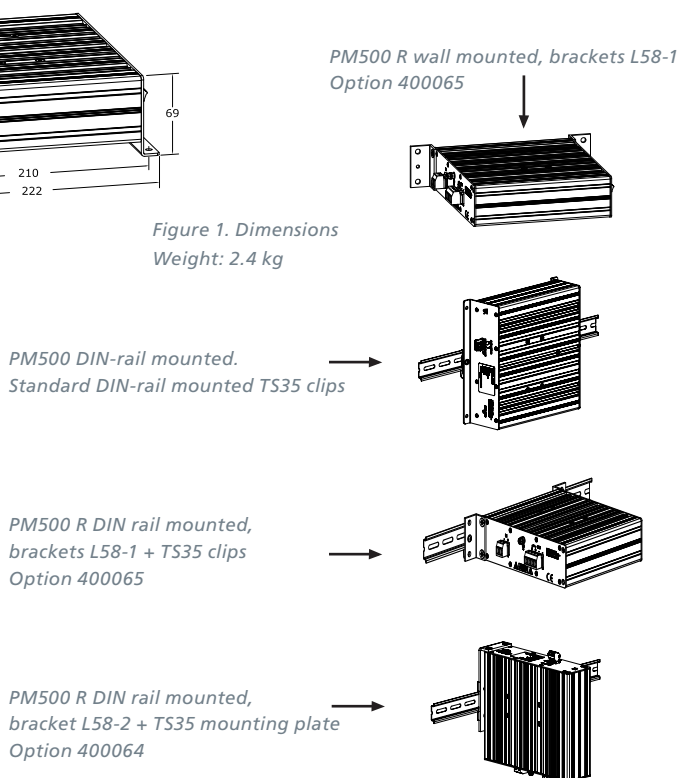


Figure 4. Wall, chassis & DIN mounting

## CE MARK

PM500 meets the requirements defined by CE mark as apparatus.

PM500 meets requirements of EMC directive, low voltage directive (LVD) and RoHS II directive.

The PM500 family is in respect to EMC, a stand alone unit can also be installed in any other environment by a professional installer.

Please note that product standards can demand different levels or other basic standard tests. We test according to levels below. For higher levels or other tests, contact factory.

## SAFETY STANDARD EN/IEC 60950

| ISOLATION TESTABLE LEVELS | TEST VOLTAGE            |
|---------------------------|-------------------------|
| Input / Output            | 3 kVa.c. / 4.3 kVd.c.   |
| Input / Alarm             | 3 kVa.c. / 4.3 kVd.c.   |
| Input / Case              | 2.5 kVa.c. / 3.6 kVd.c. |
| Output / Case all outputs | 2.5 kVd.c.              |
| Output / Alarm            | 2.5 kVd.c.              |
| Case / Alarm              | 2.5 kVd.c.              |

## EMC

| EMC STANDARDS                  | EMC PERFORMANCE         |                     | REMARKS                                                  |
|--------------------------------|-------------------------|---------------------|----------------------------------------------------------|
| <b>Emission standards</b>      | <b>EN IEC 61000-6-3</b> |                     | <b>Commercial and light-industrial environments</b>      |
|                                | <b>Input</b>            | <b>Output</b>       |                                                          |
| EN 55016 CISPR16 (0.15-30 MHz) | OK                      | OK                  | opt. EN 55022 level B                                    |
| EN 55016 CISPR16 (30-1000 MHz) | OK                      |                     | Enclosure test                                           |
| <b>Immunity standards</b>      | <b>EN IEC 61000-6-2</b> |                     | <b>Industrial environments</b>                           |
| EN IEC 61000-4-2               | 8 kV / 8 kV             |                     | Contact / air, Enclosure test                            |
| EN IEC 61000-4-3               | 20 V/m AM-Modulated     |                     | Output ripple can increase to 1 % of Vout Enclosure test |
| EN IEC 61000-4-4               | ± 4 kV                  | ± 4 kV              |                                                          |
| EN IEC 61000-4-5, EN 50121-4   | ± 1 kV / ± 2 kV         | ± 1 kV / ± 2 kV     | Line-line 2 Ω / Line-case 12 Ω                           |
| EN IEC 50121-3-2               | ± 1 kV / ± 2 kV         | ± 1 kV / ± 2 kV     | Line-line 42 Ω / Line-case 42 Ω                          |
| EN IEC 61000-4-6               | 10 V <sub>RMS</sub>     | 10 V <sub>RMS</sub> | AM-Modulated                                             |
| EN IEC 61000-4-8               | Not sensitive           |                     | Enclosure test                                           |
| EN IEC 61000-4-10              | Not sensitive           |                     | Enclosure test                                           |

We use the EMC product standard "Low voltage power supplies DC output" EN 61204-3 as base for measurement principles. The Immunity EMC levels are elevated in order to comply to EN 50121-3-2 (IEC 62236-3-2) Railway application: Rolling stock – Apparatus, and EN 50121-4 (IEC 62236-4) Railway application: Signaling and telecommunication apparatus. Also to meet relevant parts of IEC 61000-6-5 Generic Standards – Immunity for power stations and substation environments.



### HEAD OFFICE

Polyamp AB  
Box 925  
SE-191 29 Sollentuna  
Sweden  
Phone: +46 8 594 693 00  
Telefax: +46 8 594 693 05

### SALES OFFICE

Polyamp AB  
Box 229  
SE-597 25 Åtvidaberg  
Sweden  
Phone: +46 120 854 10  
Telefax: +46 120 854 05

### SALES OFFICE

Switch Craft S.A  
Ruel bel Air 63  
CH-2300 La Chaux-de-fonds  
Switzerland  
Phone: +41 32 96 78800  
Telefax: +41 32 96 78809

Email: [info@polyamp.se](mailto:info@polyamp.se)  
[www.polyamp.com](http://www.polyamp.com)