

DECKBLATT ZUM ORIGINAL-DOKUMENT DES HERSTELLERS

18KW | DATENBLATT GERÄTE

HERSTELLER Regatron AG
PRODUKTSERIE G5.IND-Serie [36kW_1000V]

Ihr direkter Ansprechpartner für Regatron-Produkte!

Die Ing. Erhard Fischer GmbH ist Ihr zuverlässiger Partner für die Produkte von Regatron AG. Wir bieten Ihnen nicht nur hochwertigen technischen Support, sondern auch kompetente Beratung und maßgeschneiderte Lösungen für Ihre individuellen Anforderungen.

Ob Standardprodukt, kundenspezifische Geräte oder Schaltschrankbau. Wir freuen uns, Sie bei Ihrer Lösungsfindung mit eingehender Kundenberatung kompetent unterstützen zu können.

Kontaktieren Sie uns für technische Beratung oder ein individuelles Angebot!

Wir freuen uns auf das Gespräch mit Ihnen.



IHR ANSPRECHPARTNER

Martin Sochor



+43 2236 42694-40



powersupply@ing-fischer.at



Ing. Erhard Fischer GmbH



Weissenbach 101 | AT-2371 Hinterbrühl



www.ing-fischer.at



ING. ERHARD FISCHER GMBH

**Immer die passende Lösung für Industrie-
Stromversorgungen, Heizfolien & Messtechnik**


G5.IND.36.1000.108

Industrial Series Regenerative DC Source Sink

- 36 kW
- 1000 V
- 108 A

Features

- Bidirectional DC power supply
- Energy regeneration
- Designed for basic performance tests
- G5.Control operating SW + API

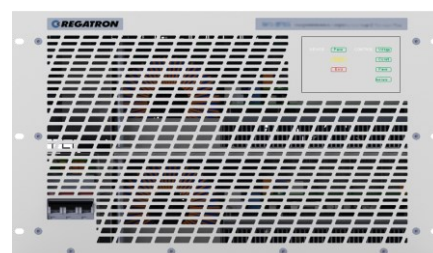

Key Values

Power		36 kW
Voltage DC	limited by P_{max}	1000 V
Current Range	short circuit proof limited by P_{max}	-108...108 A
Autorangeing factor <i>see Figure 1</i>	$U_{max} \times I_{max} / P_{max}$	3
Master-slave / multi-device configuration		parallel only
Max. number of devices in system		20
Max. number of devices in parallel		20
Case		19" / 7 U

AC Lineside Rating

Mains connection type	delta	3L + PE (no neutral conductor)
Rated voltage		3× 380...480 VAC ±10%
Rated current	@nominal 3× 380 VAC @nominal 3× 400 VAC @nominal 3× 415 VAC @nominal 3× 440 VAC @nominal 3× 460 VAC @nominal 3× 480 VAC	58 A _{rms} 55 A _{rms} 53 A _{rms} 50 A _{rms} 48 A _{rms} 46 A _{rms}
Rated frequency		50/60 Hz
Power factor	@ P_{max}	0.99
THDi	@90% P_{max}	≤3%
Inrush current		<66 A _{rms}
Efficiency	$P_{max} @ U_{max}$ $P_{max} @ I_{max}$	95% 94%
Standby power	active / reactive @3× 400 V / 50 Hz	52 W / 2 kvar
Isolation	working voltage AC terminals to PE working voltage AC to DC terminals test voltage AC terminals to PE	900 VDC 1500 VDC 3100 VDC / 2 s
Protective earth conductor current	according to IEC 60990	≤6.5 mA @150 Hz
Touch current unweighted	output ON/OFF @3× 400 V / 50 Hz	≤0.9 mA / 3.7 mA (typ.)
Touch current weighted	output ON/OFF @3× 400 V / 50 Hz	≤0.8 mA / 3.6 mA (typ.)
Input filter discharge <i>to <60 V</i>	L-PE / L-L with option XCD	<20 s <1 s

DC Operation

Operation modes		source, sink, bidirectional
Voltage regulation	CV	0...100% U_{max}
Current regulation	CC	-100...100% I_{max}
Power regulation	CP	-100...-5% / 5...100% P_{max}
Programmable load	CR, R_{max} @ U_{max} ; R_{min} @ U_{min}	0.19...3333 Ω
Internal resistance simulation	programmable	0...18519 m Ω
Min. voltage normal sink mode <i>see Figure 2</i>	@ I_{max} @10% I_{max}	30 V 15 V
Min. voltage LV sink mode <i>see Figure 2</i>	@ I_{max} @10% I_{max}	5 V 2 V
Static accuracy <i>At 25 °C ambient temperature, constant line / load conditions, after 1h warm up time in voltage on state, normal distribution (k=2)</i>	power @ I_{max} 1 kHz Filter voltage voltage sense current full range 1 kHz Filter @30% U_{max} resistance @ I_{max} 1 kHz Filter	0.1% FS 0.05% FS 0.05% FS 0.1% FS 0.1% FS
Output capacitance	X-capacitor Y-capacitor @DC	222 μ F 181 nF
Ripple, voltage <i>output voltage ripple (10 Hz...3.8 MHz): V_{rms} 90% P_{max}, 90% U_{max}, CV mode</i>	ohmic load	$\leq 0.02\%$ FS
Ripple, current	output current ripple (10 Hz...3.8 MHz): A_{rms} LowCap, ohmic load 90% P_{max} , CC mode	$\leq 0.05\%$ FS
Noise	noise (4.1 kHz...3.8 MHz): V_{pp} ohmic load 90% P_{max} , 90% U_{max} , CV mode	$\leq 0.1\%$ FS
Stability/drift <i>8h, after 1h warm up time in output on state, at constant line input, load and temp. conditions</i>	voltage voltage sense current current low range (-10%...10% FS)	$\leq 0.01\%$ FS $\leq 0.01\%$ FS $\leq 0.01\%$ FS $\leq 0.01\%$ FS
Temperature coefficient <i>At constant line and load conditions</i>	voltage voltage sense current	$\leq 0.005\%$ FS/°C $\leq 0.007\%$ FS/°C $\leq 0.005\%$ FS/°C
Rise/fall time (10...90% of step) <i>Voltage set-value step, const. ohmic load</i>	voltage step (0...90% U_{max} / 90% P_{max})	2 ms
Rise/fall time (10...90% of step) <i>Current set-value step, const. voltage</i>	current step (-90...90% I_{max} , @33% U_{max}) 10...90% of step / settling time current step (-90...-10% I_{max} , @33% U_{max}) 10...90% of step / settling time current step (10...90% I_{max} , @33% U_{max}) 10...90% of step / settling time	1.5 ms / 3 ms 0.6 ms / 2.5 ms 0.6 ms / 2.5 ms
Transient response time <i>Load step, ohmic load</i>	CV, recovery within 0.5% set voltage 0...90% P_{max} @90% U_{max}	$\leq 100 \mu$ s
Transient response time <i>Load step, ohmic load</i>	CC, recovery within 5% of set current 45...90% P_{max} @90% I_{max}	≤ 2 ms
Voltage drop <i>while load switching on</i>	-90...90% P_{max} @90% U_{max} -90...90% P_{max} @33% U_{max} 45...90% P_{max} @90% U_{max}	$\leq 2\%$ FS $\leq 4\%$ FS $\leq 0.6\%$ FS

DC Operation (continued)

Voltage overshoot <i>while load switching off</i>	90...90% P_{max} @90% U_{max}	≤2% FS
	90...90% P_{max} @33% U_{max}	≤4% FS
	90...45% P_{max} @90% U_{max}	≤0.5% FS
Pulsating load <i>max. allowed ripple V_{rms} sine</i>		≤80 Hz: 352 V_{rms} 100 Hz: 282 V_{rms} 150 Hz: 176 V_{rms} 200 Hz: 134 V_{rms} 250 Hz: 106 V_{rms} 300 Hz: 80 V_{rms} 400 Hz: 60 V_{rms} 500 Hz: 52 V_{rms} 1 kHz: 22 V_{rms} 2 kHz: 8 V_{rms}
Max. ripple <i>DC+ to PE / DC- to PE</i>	max. allowed ripple V_{rms} ≤1 kHz: 1050 V_{rms} >1 kHz: $((1.26 \times 10^6)/f+5) V_{rms}$	≤1kHz: 1050 V_{rms} 2 kHz: 630 V_{rms} 5 kHz: 250 V_{rms} 10 kHz: 130 V_{rms} 20 kHz: 65 V_{rms} 50 kHz: 30 V_{rms} 80 kHz: 20 V_{rms}
Protection	OVP (over voltage protection) OCP (over current protection) OPP (over power protection) OTP (over temperature protection)	programmable programmable programmable ✓
Output discharge <i>to <60V</i>	active discharge enabled active discharge disabled	≤1 s <75 s
Sense voltage compensation		programmable $U_{out} + U_{drop}$ limited by $U_{out\ max}$
Sense input impedance	@operation @output off @output off "measurement at voltage-off" disabled	1212 kΩ 1212 kΩ open open
Ballast resistor DC power port	@output off	74 kΩ
Resistance	DC+/DC- output to PE X713 jumper inserted DC+/DC- output to PE X713 jumper removed	22 MΩ open
Absolute maximum ratings	output voltage DC+ to DC- DC+/DC- output to PE	1100 VDC 1500 VDC
Output isolation	test voltage DC terminals to PE	2500 VDC / 2 s
Logic isolation	test voltage logic to PE	500 V (2 s)
Galvanic Isolation	AC input to DC output	✓

Various

Case dimensions <i>see Figure 3</i>	H × W × D without terminals	311 × 483 × 673 mm 12 1/4" × 19" × 26 1/2"
Weight		87 kg / 192 lbs
AC terminals	screw terminals	6...35 mm ² (AWG 10...2) wires d ≤8.5 mm (11/16")
DC terminals		output bars for M8 bolts
Communication interface	speed depending on bus load (*) = optional	Ethernet (max. 800 × 16 bit/s), USB (max. 450 × 16 bit/s), (*) CANmp (20 × 16 bit/ms), (*) EtherCAT (100 Mbps)
Enclosure	rating	IP20 / NEMA 1
Option cards	# of free slots	2

Analog Inputs

Number of inputs	n.a.
------------------	------

Analog Outputs

Number of outputs	n.a.
-------------------	------

Digital I/O

Number of digital inputs/outputs	n.a.
----------------------------------	------

Relay Outputs

Number of relay outputs	n.a.
-------------------------	------

Ambient

Operating altitude	above sea level above 1000 m, slight temp. derating possible	≤2000 m (6562 ft)
Operating temperature	with airfilter	-5...50 °C 10 °C less
Storage temperature		-25...70 °C
Installation	IEC 60721-3-3	3K22, indoor, air-conditioned in protected 19" switch cabinet
Orientation	storage, installation, operation	upright
Absolute humidity max.		25 g/m ³
Relative humidity	non-condensing	≤85%
Vibration	IEC 60068-2-6	test Fc
Cooling		direct forced air, front to back
Acoustic noise level 1 m dist. front (typ.)	90% P _{max} , 90% I _{max} @25 °C ambient 90% P _{max} , 90% I _{max} @40 °C ambient	≤54 dB ≤71 dB

Standards

Protection class	EN 62477-1	1
Degree of pollution	EN 60664-1	2
Overvoltage category	mains input L-L / L-PE, EN 60664-1; EN 62477-1 other interfaces	II / III II
Area of application		industrial
Approval		CE Marking, UKCA
EN 62477-1:2012 + A11:2014 + A1:2017 + A12:2021	Low Voltage Directive 2014/35/EU	✓
BS EN 62477-1:2012 + A11:2014 + A1:2017 + A12:2021	Electrical Equipment (Safety) Regulations 2016	✓
EN 61010-1:2010	Low Voltage Directive 2014/35/EU	✓
BS EN 61010-1:2010	Electrical Equipment (Safety) Regulations 2016	✓
EN ISO 13849-1:2015	w/o ISR with ISR 2-channel with ISR 2-channel and external safety relay	- up to PL c up to PL e
EN 61000-6-4:2007 A1:2011 / EN61000-6-4:2019	Directive 2014/30/EU EMC emission (industrial)	✓
BS EN 61000-6-4:2007 A1:2011 / BS EN61000-6-4:2019	Electromagnetic Compatibility Regulations 2016 EMC emission (industrial)	✓
EN 61000-6-2:2005 / EN 61000-6-2:2019	Directive 2014/30/EU EMC immunity (industrial)	✓
BS EN 61000-6-2:2005 / BS EN 61000-6-2:2019	Electromagnetic Compatibility Regulations 2016 EMC immunity (industrial)	✓

Standards (continued)

EN 61000-3-11:2017	Electromagnetic compatibility (EMC). Part 3-11: Equipment rated ≤75A	✓
BS EN 61000-3-11:2017	Electromagnetic compatibility (EMC). Part 3-11: Equipment rated ≤75A	✓
EN 61000-3-12:2011	Electromagnetic compatibility (EMC) – Part 3-12: Equipment rated > 16 A and ≤ 75 A	✓
BS EN 61000-3-12:2011	Electromagnetic compatibility (EMC) – Part 3-12: Equipment rated > 16 A and ≤ 75 A	✓
EN 61326-1:2013	Directive 2014/30/EU EMC industrial level A	✓
BS EN 61326-1:2013	Electromagnetic Compatibility Regulations 2016 EMC industrial level A	✓
EN IEC 63000:2018	RoHS Directive	✓
BS EN IEC 63000:2018	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012	✓
EMV-ILA 01-03b	Emission 9...150 kHz test stand area	✓

Operating area

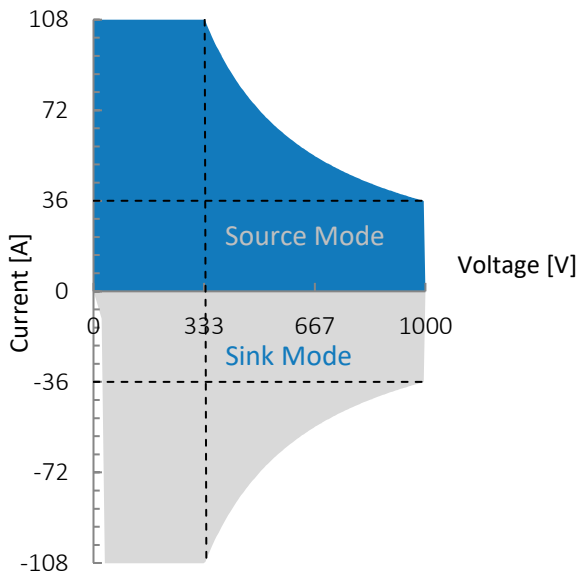


Figure 1: G5.IND.36.1000.108, voltage/current operating area.

X-axis zoom source-sink @low voltage

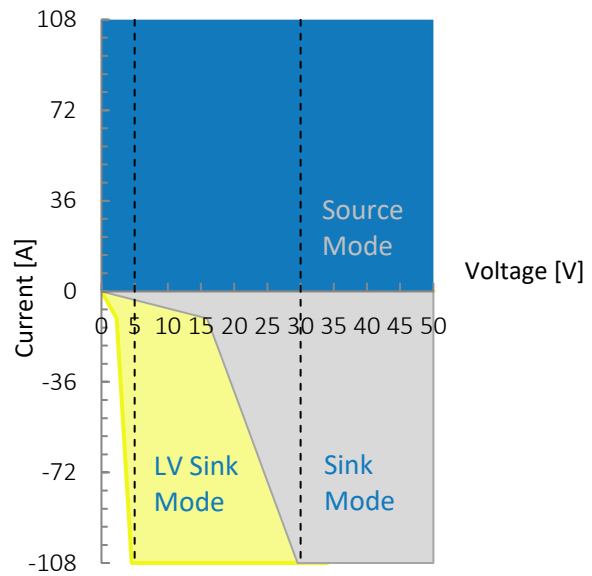


Figure 2: Normal sink mode in grey area down to 15(30) V.
To use the LV Sink mode (yellow area), the upper voltage limit has to be lowered,
- to 20 V for sink down to 2(5) V (yellow area)
- to 332 V or higher for sink down to 15(30) V (grey area)
- any other value between 20 V and 332 V
will lead to a minimum sink voltage between 2(5) V and 15(30) V.

Dimensions

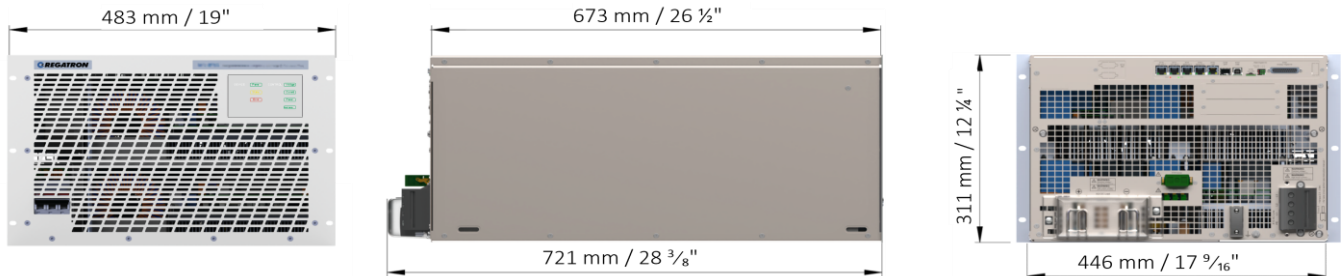


Figure 3: Front, right hand side and rear view. 19-inch module with 7 units in height.
Add 74 mm / 2 7/8" to case depth for protective cover.

For further information to included features see related product description <PD_G5.IND....> on www.regatron.com

This product is developed, produced and tested according to ISO 9001 by REGATRON.

For detailed technical information, contact REGATRON or your local sales partner.

Regatron AG
Feldmuehlestrasse 50
9400 Rorschach
SWITZERLAND

Regatron Inc.
100 Overlook Center, 2nd Floor
Princeton, NJ 08540
USA

sales@regatron.com
www.regatron.com

inquiries@us.regatron.com
www.us.regatron.com

All product specifications and information contained herein are subject to change without notice.

Filename: DS_G5.IND.36.1000.108_EN_V01.87.pdf

Class: Project specific use only