

DECKBLATT ZUM ORIGINAL-DOKUMENT DES HERSTELLERS

16KW | DATENBLATT GERÄTE

HERSTELLER Regatron AG
PRODUKTSERIE TopCon Quadro-Serie [16kW_65V]

Ihr direkter Ansprechpartner für Regatron-Produkte!

Die Ing. Erhard Fischer GmbH ist Ihr zuverlässiger Partner für die Produkte von Regatron AG. Wir bieten Ihnen nicht nur hochwertigen technischen Support, sondern auch kompetente Beratung und maßgeschneiderte Lösungen für Ihre individuellen Anforderungen.

Ob Standardprodukt, kundenspezifische Geräte oder Schaltschrankbau. Wir freuen uns, Sie bei Ihrer Lösungsfindung mit eingehender Kundenberatung kompetent unterstützen zu können.

Kontaktieren Sie uns für technische Beratung oder ein individuelles Angebot!

Wir freuen uns auf das Gespräch mit Ihnen.



IHR ANSPRECHPARTNER

Martin Sochor



+43 2236 42694-40



powersupply@ing-fischer.at



Ing. Erhard Fischer GmbH



Weissenbach 101 | AT-2371 Hinterbrühl



www.ing-fischer.at



ING. ERHARD FISCHER GMBH

**Immer die passende Lösung für Industrie-
Stromversorgungen, Heizfolien & Messtechnik**

TC.P.16.65.400.S

Programmable DC Power Supply (TopCon Quadro)

- 16 kW
- 65 V
- 308 A

Features

- Unidirectional power supply
- Proven dynamics
- Cost effective
- TopControl operating SW + API



Key Values

Power		16 kW
Voltage DC	limited by P_{max}	65 V
Current	limited by P_{max} and ambient temperature	308 A
Autoranging factor	$U_{max} \times I_{max} / P_{max}$	1.25
<i>Figure 1</i>		
Master-slave / multi-device configuration		parallel, series, mixed
Max. number of devices in system	may be extended by TC.MAC	16
Max. number in parallel	may be extended by TC.MAC	16
Max. number in series	with midpoint earthing limited by output isolation to PE	8
Case		19" / 6U

AC Lineside Rating

Mains connection type	delta	3L + PE (no neutral necessary)
Rated voltage		3x400 V $\pm 10\%$
Rated current	@nominal 3x 360 VAC	30 A _{rms}
	@nominal 3x 380 VAC	29 A _{rms}
	@nominal 3x 400 VAC	27 A _{rms}
	@nominal 3x 415 VAC	26 A _{rms}
	@nominal 3x 440 VAC	25 A _{rms}
Rated frequency		50/60 Hz
Power factor	@ P_{max}	0.92
THDi	@90% P_{max}	32%
Input stage		6 pulse bridge rectifier
Efficiency	$P_{max} @ U_{max}$	94%
Input insulation test voltage	line to case/logic	1670 VDC (1 s)
Protective earth conductor current	According to IEC 60990	<10 mA
Touch current unweighted		20 mA
Touch current weighted		2 mA
Input filter discharge	L-PE / L-L	6.9s/8.8s
<i>to <60 V</i>		
	with option XCD	<1 s

DC Operation

Operation modes		Source
Voltage regulation	CV	0...100% U_{max}
Current regulation	CC	0...100% I_{max}
Power regulation	CP	5...100% P_{max}
Internal resistance simulation	programmable	0...211 mΩ
Load regulation	voltage	0.1% FS
<i>0...100% load</i>		
<i>At 25° ambient temperature, constant line input</i>		
	current	0.1% FS

DC Operation (continued)

Line regulation -10%...+10% line voltage <i>At 25° ambient temperature, constant load</i>	voltage	0.1% FS
	current	0.1% FS
HMI meter resolution	programming/reading	0.1 V
		0.1 A
Output capacitance	X-capacitor	1160 µF
	Y-capacitor @DC	13.6 nF
Ripple, voltage	output voltage ripple 300 Hz V_{rms} ohmic load, CV mode Typical value at nominal ohmic load, line asymmetry < 1 V_{rms}	≤0.4% FS
	output voltage ripple 300 Hz V_{pp} ohmic load, CV mode Typical value at nominal ohmic load, line asymmetry < 1 V_{rms}	≤1.1% FS
Noise	noise 40 kHz...1 MHz V_{rms} ohmic load, CV mode tpical value at nominal ohmic load, line asymmetry < 1 V_{rms}	< 0.1 V
	noise 40 kHz...1 MHz V_{pp} ohmic load, CV mode tpical value at nominal ohmic load, line asymmetry < 1 V_{rms}	< 1.5 V
Stability/drift <i>8h, after 1h warm up time in output on state, at constant line input, load and temp. conditions</i>	voltage	≤0.05% FS
	voltage sense	≤0.05% FS
	current	≤0.05% FS
Temperature coefficient <i>At constant line and load conditions</i>	voltage	≤0.02% FS/°C
	current	≤0.03% FS/°C
Rise/fall time (10...90% of step) <i>Voltage set-value step, const. ohmic load</i>	voltage step (10...90% U_{max} / 10...90% P_{max}) can be affected in multi-unit operation	<2 ms
Rise/fall time (10...90% of step) <i>Current set-value step, const. ohmic load</i>	current step (10...90% I_{max}) 10...90% of step can be affected in multi-unit operation	<2 ms
Transient response time <i>Load step, ohmic load</i>	CV, recovery within 5% set voltage 10...90% P_{max} can be affected in multi-unit operation	<2 ms
Transient response time <i>Load step, ohmic load</i>	CC, recovery within 5% of set current 10...90% P_{max} can be affected in multi-unit operation	<2 ms
Protection	OVP (over voltage protection) programmable	0...110% FS
	OCP (over current protection) programmable	0...110% FS
	OPP (over power protection) programmable	0...110% FS
	OTP (over temperature protection)	✓
Output discharge <i>to <60V</i>		<5ms
Sense voltage compensation		Programmable $U_{out} + U_{drop}$ limited by $U_{out_{max}}$
Sense input impedance		61 kΩ
Ballast resistor DC power port	@output off	50 Ω
Resistance	DC+/DC- output to PE	open
	X109 jumper inserted	
Absolute maximum ratings	Voltage	72
	Current	339
	DC+ output to PE	+1065 V / -1000V
	DC- output to PE	+1000 V / -1000V

DC Operation (continued)

Input insulation test voltage	line to case/logic	1670 VDC (1 s)
Output insulation test voltage	output to case/logic	2540 VDC (1 s)

Various

Case dimensions	H × W × D	265 × 483 × 450 mm
Figure 3	without terminals	10 1/2" × 19" × 17 3/4"
Weight		44 kg / 97 lbs
AC terminals	screw terminals	10 mm ²
DC terminals		Output bars for M8 bolts
Enclosure	rating	IP20
	current bars on rear side excluded	
Communication interface		RS232 (38400 baud)
	isolation to electronics and case	125 V
	resolution, programming and readback U, I	0.025% FS
	resolution, programming and readback P, Ri	0.1% FS
Option cards	# of free slots	1

Analog Inputs

Number of inputs	setvalues for voltage, current, power, and internal resistance	4
Resolution		12 Bit
Sampling rate		20 kHz
Input voltage range	0...100% FS	0...10 V
Isolation	to electronics and case	125 V
Input impedance		20 kΩ (typ.)
Absolut max. input voltage		30 VDC
Input filter	bandwidth programmable	OFF, 0.1...400Hz
Delay analog in to power out	can be affected in multi-unit operation	200 μs (typ.)

Analog Outputs

Number of outputs	voltage, current readback	2
Resolution		12 Bit
Update rate		10 kHz
output filter	bandwidth programmable	OFF, 0.1...400Hz
Output voltage range	0...100% FS	0...10 V
Isolation	to electronics and case	125 V
Output impedance		535 Ω (typ.)
Max. output current	short-circuit proof	28 mA
Delay power out to analog out	can be affected in multi-unit operation	200 μs (typ.)

Digital I/O

Number of digital inputs		6 (4 inputs programmable, + voltage on, +interlock)
Output voltage supplied for digital I/O		24 VDC (-15% / +20%)
Input impedance		4.7 kΩ
Max. voltage digital inputs		30 VDC
Sampling rate digital inputs		1 kHz
Max total output current all channels		200 mA
Max output current per channel	short-circuit proof	200 mA
Update rate digital outputs		10 kHz

Relay Outputs

Number of relay outputs	Error: SPST(NO) Run: SPST(NO) Warn: 1x SPDT	3
Load type		ohmic, inductive, lamp load
Max. switching voltage		30 VDC
Max. switching current		1 A
Switching time		20 ms (typ.)

Ambient

Operating altitude	above sea level above 1000 m / 3280 ft, slight temp. derating possible	≤2000 m / ≤6562 ft
Operating temperature	with airfilter	5...40 °C -10 °C
Current derating	max. continuous output current @ temperature: higher current if CDF <100% no derating if equipped with optional liquid cooling	30°C: 290 A 35°C: 270 A 40°C: 246 A
Storage temperature		-25...+70 °C
Installation	IEC 60721-3-3	indoor, air-conditioned in protected 19" switch cabinet
Orientation	storage, installation, operation	upright
Relative humidity	non-condensing	0...95%
Vibration	IEC 60068-2-6	Test Fc
Cooling		direct forced air, front to back optional liquid cooling (85%), AC100 (Al-Ti-alloy)
Acoustic noise level <i>1 m dist. front (typ.)</i>	90% P _{max} , 90% I _{max} @25 °C ambient	63 dB(A)

Standards

Protection class	EN 62477-1	1
Degree of pollution	EN 60664-1	2
Overvoltage category	mains input, EN 60664-1 / EN 62477-1 other interfaces	III II
Area of application		industrial
Approval		CE marking, UKCA
EN 62477-1:2012 <i>+ A11:2014 + A1:2017 + A12:2021</i>	Low Voltage Directive 2014/35/EU	✓
BS EN 62477-1:2012 <i>+ A11:2014 + A1:2017 + A12:2021</i>	Electrical Equipment (Safety) Regulations 2016	✓
EN ISO 13849-1:2015	w/o ISR with ISR 2-channel with ISR 2-channel and external safety relay	- PL c PL e
EN 61000-6-4:2007 A1:2011 / EN61000-6-4:2019	Directive 2014/30/EU EMC emission (industrial)	✓
BS EN 61000-6-4:2007 A1:2011 / <i>BS EN61000-6-4:2019</i>	Electromagnetic Compatibility Regulations 2016 EMC emission (industrial)	✓
EN 61000-6-2:2005 / EN 61000-6-2:2019	Directive 2014/30/EU EMC immunity (industrial)	✓
BS EN 61000-6-2:2005 / BS EN 61000-6-2:2019	Electromagnetic Compatibility Regulations 2016 EMC immunity (industrial)	✓
EN IEC 63000:2018	RoHS Directive	✓
BS EN IEC 63000:2018	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012	✓

Operating area

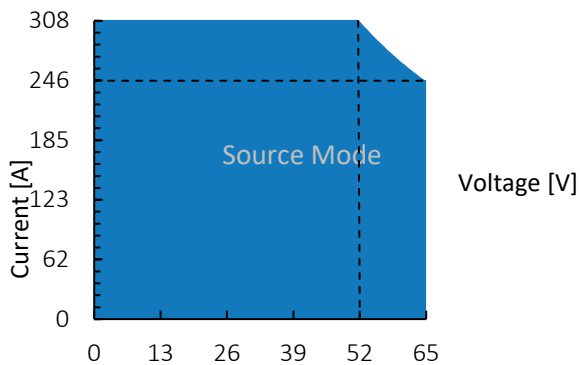


Figure 1: TC.P.16.65.400.S, voltage / current operating area.

Max.current up to 52 V

Max.Voltage up to 246 A

Dimensions

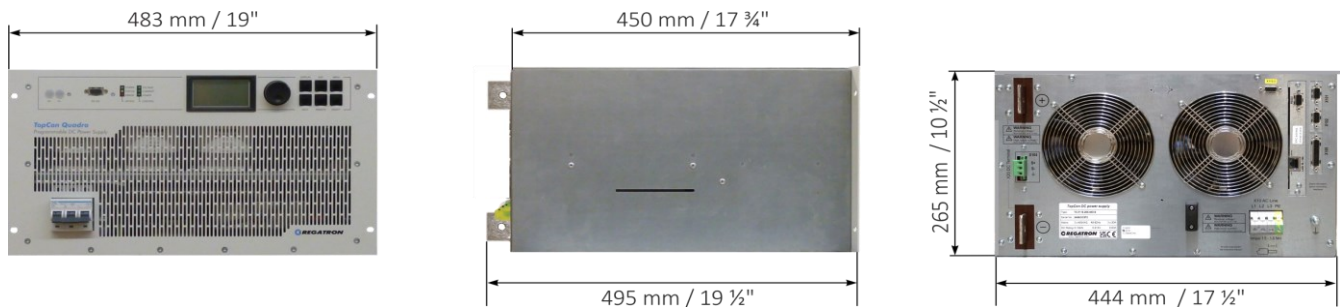


Figure 3: Front, side, and rear view. 19-inch module with 4 units in height.

This product is developed, produced and tested according to ISO 9001 by REGATRON.

For detailed technical information, contact REGATRON or your local sales partner.

Regatron AG
Feldmuehlestrasse 50
9400 Rorschach
SWITZERLAND

Regatron Inc.
100 Overlook Center, 2nd Floor
Princeton, NJ 08540
USA

sales@regatron.com
www.regatron.com

inquiries@us.regatron.com
www.us.regatron.com

All product specifications and information contained herein are subject to change without notice.

Filename: DS_TC.P.16.65.400.S_EN_2024-09-19

Class: Public

T038